



STOCK PRODUCT GUIDE

Lighting & Controls

HALO | METALUX | GREENGATE | SURE-LITES | LUMARK

2024
VOL. 1



RESIDENTIAL | COMMERCIAL | INDUSTRIAL

VISIT OUR **MARKETPRO WEBSITE**

Your one-stop shop for tools and resources designed to help grow your business

- ✓ Product Guide
- ✓ E-Commerce Tools
- ✓ Find Utility Rebates
- ✓ Sample Before You Buy
- ✓ Marketing & Training



MARKETPRO
Stock Lighting Solutions

READILY-AVAILABLE SOLUTIONS FROM OUR TRUSTED BRANDS

The MarketPro program provides our customers with top selling lighting and controls products from industry-preferred brands for their trusted performance, reliability and quality. These products are in-stock and ready to ship to meet your project needs.



In-Stock

Our essential products are in stock and readily-available to ship



Top Brands

Trusted products from HALO, Metalux, Greengate, Sure-Lites and Lumark



Proven Best Sellers

Contractor preferred top selling lighting and controls products



Sample Before You Buy

Try new products risk free



Innovation

State-of-the-art product innovation, direct mount installation, selectable technology and integrated controls



Utility Incentives

Products qualify for ENERGY STAR® and DLC®, saving money and adding value



Expanded Selection

Customizable lighting products available through our Rapid Response and Quick Ship programs



Training & Education

Online and instructor-led classes to expand your lighting and controls knowledge

Visit the MarketPro website to download the product guide



[COOPERLIGHTING.COM/MARKETPRO](https://www.cooperlighting.com/marketpro)

OUR BRANDS AND THE MARKETS WE SERVE



RESIDENTIAL

Residential lighting fixtures for single and multi-family construction and remodel projects.



COMMERCIAL

Lighting and controls solutions for healthcare, education, hospitality, retail and office.



INDUSTRIAL







Lighting and controls solutions for warehouses, distribution centers and logistic facilities.



OUTDOOR

Lighting and controls solutions for warehouses, distribution centers and logistic facilities.

We deliver a range of innovative and reliable indoor and outdoor lighting and controls product solutions specifically designed to maximize performance, energy efficiency and cost savings.


-  **8 HALO**
Recessed & Surface Downlights
-  **36 METALUX**
Ambient Commercial & Industrial
-  **50 ARCHITECTURAL**
Commercial Lighting
-  **52 GREENGATE**
Sensors & Switch Controls
-  **56 SURE-LITES**
Exit & Emergency
-  **64 LUMARK**
Outdoor Commercial & Industrial

SELECTABLE TECHNOLOGY

Multiple Light Choices, One Fixture.

Explore **200+**
selectable products
from **HALO, Metalux**
and **Lumark**

Field-Selectable technology empowers you to take control. Go selectable to choose your way, every time. Adjust color temperatures (CCT) and lumen outputs with the flip of a switch!

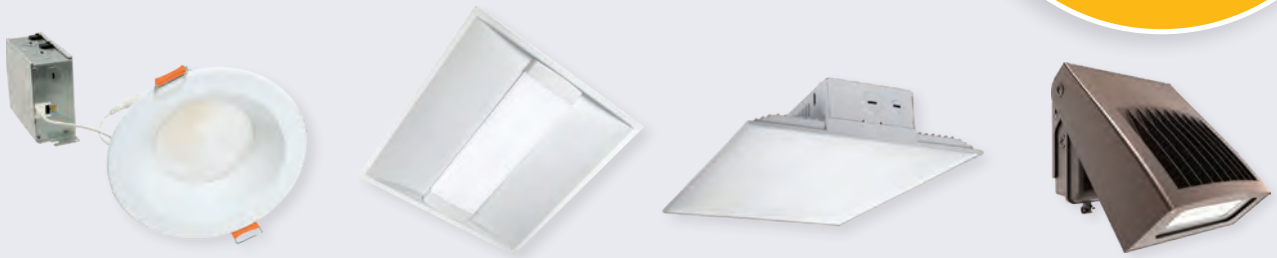

SELECTABLE COLORS (CCT)

Choose from a wide range of color temperatures to set the ideal lighting scene.



SELECTABLE LUMENS

Select between the preset lumen outputs to create your optimal lighting experience.

For details visit:

cooperlighting.com/selectable to download the latest Selectable Lighting Product Guide.



Product Spotlight

▶ **HALO CJB Integrated JBox Canless Downlight**

The CJB Integrated JBox Downlight gives you the freedom to add a fixture where you want, while maintaining an attractive, consistent look. It installs easily just about anywhere and features two mounting options.

PAGE **19**



LED Trim Retrofit



Canless

▶ **Metalux Achieva™ Recessed Troffer**

The ultra slim 1.5" Achieva™ Recessed troffer offers selectable lumen output and color temperature with a simple, easy to access toggle switch.

PAGE **39 & 44**



also available with WaveLinX LITE



▶ **Metalux Achieva™ Surface Wrap**

The Achieva Wrap Selectable is a versatile commercial grade wrap solution suitable for ceiling, wall, or suspension mounting and matches up great with the Achieva Recessed Selectable portfolio.

PAGE **41**



At Cooper Lighting Solutions, we build forward-thinking lighting solutions that make people's lives safer, while making buildings, homes and cities smarter and more sustainable. Continue reading to learn about our latest lighting solutions and new MarketPro products.

▶ **Metalux SPHB** High Bay


The SPHB is a compact linear solution with flexible features suitable for multiple applications. It offers selectable lumens from 12,000 up to 36,000, selectable CCT, and a sensor-ready port for quick plug and play control.



Page **48**

▶ **All Pro APXRG & APCRG Series** Emergency Lighting

The APXRG and APCRG are fully code compliant, polycarbonate LED solutions for exit and emergency needs with selectable red or green faces.

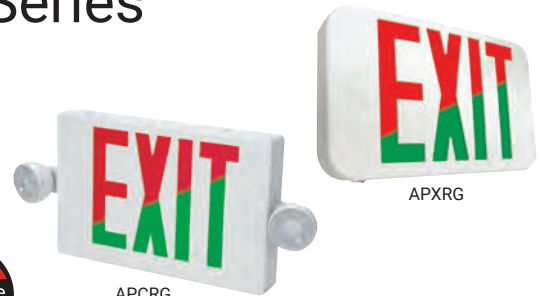

PAGE **61**

▶ **Lumark NHR Night Harrier** Floodlight

The all-new Night Harrier was designed for years of maintenance-free service thanks to cutting edge innovation that will save you time and money.



PAGE **71**



Canless
Downlighting
p. 9-19



Surface Mount
Downlighting
p. 20-23



Recessed
LED Trims
p. 24-26



Housings &
Trims
p. 27-28



Under
Cabinets
p. 29



Smart Wi-Fi
Lighting
p. 30-31

HALO[®]

RECESSED LED DOWNLIGHTS

HALO is the industry leader in high-quality recessed downlighting, offering the widest selection of innovative and flexible solutions for your application needs.



HALO[®] CANLESS DOWNLIGHTING

GO CANLESS! Installs Virtually Anywhere!

- Field-Selectable color temperatures
- Installs into drywall/suspended ceiling (no housing required)
- Remote driver/junction box included
- Rated for insulated and non-IC ceilings


MORE FLEXIBILITY!
SAVE TIME AND MONEY!
NO HOUSING NEEDED!

Quick and Easy Installation

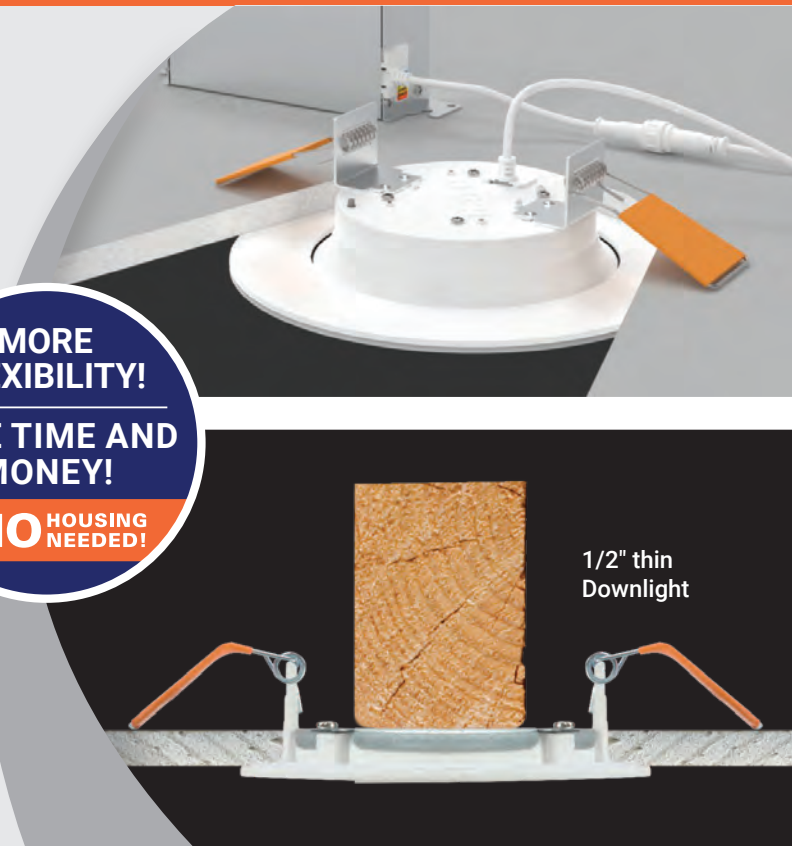

New Construction Mounting Frames CANLESS DOWNLIGHT

- Use HALO's canless mounting frames on your next new construction or remodeling project
- Toolless thumbscrews hold HALO canless remote driver/j-boxes to the mounting frame
- MF Series available in 4" and 6" rounds with 1/2" drywall collar
- HL Series available in 3", 4", 6", and 8" rounds and convert to squares with corner knockouts

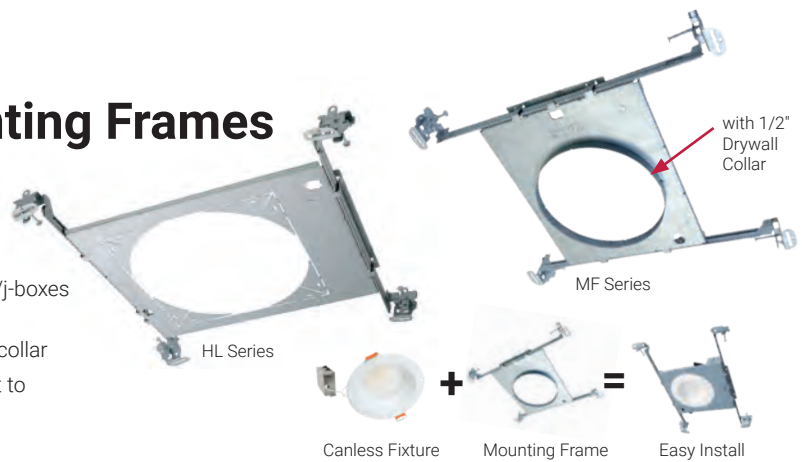

Catalog Number	Description	UPC
MF4RC	4" Round/Square Mounting Frame with 1/2" Collar	080083268009
MF6RC	6" Round/Square Mounting Frame with 1/2" Collar	080083268023
HL3RSMF	3" Round/Square Mounting Frame	080083876143
HL4RSMF	4" Round/Square Mounting Frame	080083876167
HL6RSMF	6" Round Mounting Frame	080083876181
HL8RSMF	8" Round Mounting Frame	080083890460

HALO SLIM CANLESS DOWNLIGHTING

HALO SLIM CANLESS DOWNLIGHT PRODUCT SELECTION GUIDE

Good Better Best

	HLBSL & HLBE	HLBPH	HLB	HLBC
FEATURES/PERFORMANCE	Slim 1/2" Thin	✓	✓	✓ + 2-in-1 Install Option (Canless-to-Can)
	Size / Shape	4" & 6" Round	4", 6" Round	3", 4", 6", 8", 12" Round, Square
	Lens	Smooth	Smooth	Low-glare Prismatic
	Max Lumens (By size @ 3000K)	745, 1,025	805, 1,015	595, 790, 1,020, 2,350, 2,300
	Field SeleCCT Color Temp Switch	3 CCT 27/30/3500K 30/40/5000K, Dedicated: 3000K	5 CCT 27/30/35/40/5000K	5 CCT 27/30/35/40/5000K
CONTROL	Dimming Phase Cut (LE/TE) / 0-10V	10% Phase Cut	5% Phase Cut	5% Phase Cut
	Estimated Life Hours	35K	50K	50K
	Input Voltage	120V	120V	120V, 120-277V
ACCESSORIES	Fits Mounting Frame	✓	✓	✓
	Decorative Overlays ³	✓	✓	✓ ¹
	Slide-in-Side™ Wire Traps ⁴		✓	✓
	Mounting Bar	✓ ⁵	✓	✓

¹ Round and Round-to-Square Designer Overlay Trims sold separately. ² HLBs are also available in QuickLink Low Voltage (Phase Cut or 0-10V) or Smart Wi-Fi Connected by WiZ Pro versions. ³ Matte Black, Tuscan Bronze, Satin Nickel, Paintable Matte White. ⁴ Slide-N-Side wire traps eliminate the need to use knockouts in most instances. Pre-wire outside of the j-box, fold down the tab(s), and insert non-metallic sheathed cable into the Slide-N-Side strain relief. ⁵ Mounting Bars are included with HLBSL but are sold separately for the HLBE Bulk Packs (HLBEMOUNT-12PK).

HLBC Slim Regressed Series CANLESS DOWNLIGHT

- Standard HLBC is canless with dedicated lumens while the HLBC-LS features Lumen Select and 2-in-1 installation for fast Canless-to-Can conversion!
- Regressed baffle die-cast aluminum trim and prismatic lens improve visual comfort
- 6-Position Switch: 5 Color Field-Selectable in 27/30/35/40/5000K + Dim-to-Warm (3000K dims to 1800K)
- LED downlight with remote driver/junction box
- 5% Dimming (Phase Cut or 0-10V), 50K hrs, 90+ CRI



Catalog Number	Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
HLBC4069FSD2W1EMW	4" Downlight, Canless Only	White	60W	2700K-5000K+D2W	120V	675	8	080083263059	2406524
HLBC4LS9FSD2W1EMWR	4" Downlight, 2-in-1 Install	White	60-70W	2700K-5000K+D2W	120V	Lumen Select 600-900	13	080083263097	Pending
HLBC4LS9FSD2W1EMWR-CA	4" Downlight, 2-in-1 Install, CA T20	White	60-70W	2700K-5000K+D2W	120V	Lumen Select 600-900	13	080083267927	Pending
HLBC4LS9FSD2WE010MWR	4" Downlight, 2-in-1 Install	White	60-70W	2700K-5000K+D2W	120-277V	Lumen Select 600-900	13	080083263233	Pending
HLBC4LS9FSD2WE010MWR-CA	4" Downlight, 2-in-1 Install, CA T20	White	60-70W	2700K-5000K+D2W	120-277V	Lumen Select 600-900	13	080083267965	Pending
HLBC6099FSD2W1EMW	6" Downlight, Canless Only	White	70W	2700K-5000K+D2W	120V	1,010	12	080083263073	Pending
HLBC6LS9FSD2W1EMWR	6" Downlight, 2-in-1 Install	White	60-70W	2700K-5000K+D2W	120V	Lumen Select 900-1,200	16	080083263219	Pending
HLBC6LS9FSD2W1EMWR-CA	6" Downlight, 2-in-1 Install, CA T20	White	60-70W	2700K-5000K+D2W	120V	Lumen Select 900-1,200	16	080083267941	Pending
HLBC6LS9FSD2WE010MWR	6" Downlight, 2-in-1 Install	White	60-70W	2700K-5000K+D2W	120-277V	Lumen Select 900-1,200	16	080083263257	Pending
HLBC6LS9FSD2WE010MWR-CA	6" Downlight, 2-in-1 Install, CA T20	White	60-70W	2700K-5000K+D2W	120-277V	Lumen Select 900-1,200	16	080083267989	Pending

HALO SLIM CANLESS DOWNLIGHTING

HLB & HLBPH Slim CANLESS DOWNLIGHT

- An ultra-thin flange and sleek downlight design that fits under any obstruction
- Two Versions: HLB-Die-cast aluminum with low-glare prismatic lens OR HLBPH-Dead-front plastic frame with smooth lens
- 5 Color Field-Selectable in 27/30/35/40/5000K
- LED downlight with remote driver/junction box
- 5% Dimming (Phase Cut or 0-10V), 50K hrs, 90+ CRI



Catalog Number	Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
HLB3059FS1EMWR	3" Downlight, Round	White	40W	2700K-5000K	120V	575	9	080083151301	2370657
HLB3S059FS1EMWR	3" Downlight, Square	White	40W	2700K-5000K	120V	595	9	080083151325	N/A
HLB4SP069FS1EMWR	4" Downlight, Square	White	65W	2700K-5000K	120V	650	10	080083909667	2347583
HLB4069FS1EMWR	4" Downlight, Round	White	65W	2700K-5000K	120V	790	12	080083848140	2322243
HLB6099FS1EMWR	6" Downlight, Round	White	70W	2700K-5000K	120V	1,020	16	080083848164	2322242
HLB6S099FS1EMWR	6" Downlight, Square	White	70W	2700K-5000K	120V	975	12	080083863389	2331663
HLB8169FS1EMWR	8" Downlight, Round	White	90W	2700K-5000K	120V	1,760	21	080083150601	2358047
HLB4069FSE010MWR	4" Downlight, Round (0-10V)	White	65W	2700K-5000K	120-277V	790	11	080083912261	2351376
HLB4S069FSE010MWR	4" Downlight, Square (0-10V)	White	65W	2700K-5000K	120-277V	725	11	080083912308	N/A
HLB6099FSE010MWR	6" Downlight, Round (0-10V)	White	70W	2700K-5000K	120-277V	1,060	15	080083912285	2351377
HLB6S099FSE010MWR	6" Downlight, Square (0-10V)	White	70W	2700K-5000K	120-277V	975	15	080083912322	N/A
HLB8LS9FSE010MWR	8" Downlight, Round (0-10V)	White	90-150W	2700K-5000K	120-277V	Lumen Select 1,400-2,400	31	080083083367	2358045
HLB12LS9FSE010MWR	12" Downlight, Round (0-10V)	White	90-150W	2700K-5000K	120-277V	Lumen Select 1,300-2,300	32	080083088782	N/A
HLBPH4069FS1EMWR	4" Downlight, Round	White	65W	2700K-5000K	120V	805	10	080083190003	2385132
HLBPH6099FS1EMWR	6" Downlight, Round	White	70W	2700K-5000K	120V	1,015	14	080083190027	2385133

HLBSL & HLBE Slim Lite CANLESS DOWNLIGHT

- Offers simplified features for budget-conscious installers
- 3 Color Field-Selectable in 27/30/3500K or 30/40/5000K; dedicated 3000K
- Only available in HALO's dead-front plastic frame and smooth lens
- LED downlight and remote driver/junction box with mounting bar*
- 10% Phase Cut (LE/TE) Dimming, 35,000 hrs, 90+ CRI



Catalog Number	Description	Finish	Replaces Up To	CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
HLBSL4069FS231EMWR	4" Downlight	White	65W	2700K-3500K	120V	753	10	080083912346	2349484
HLBSL4069FS351EMWR	4" Downlight	White	65W	3000K-5000K	120V	735	10	080083916368	2349485
HLBSL6099FS231EMWR	6" Downlight	White	70W	2700K-3500K	120V	955	13	080083912360	2349475, 2349476, 2349477
HLBSL6099FS351EMWR	6" Downlight	White	70W	3000K-5000K	120V	950	13	080083916382	2349478, 2349479, 2349480
HLBE4069301EMWR-12PK*	4" Downlight (12-Pack)	White	65W	3000K	120V	740	10	080083265503	2405484
HLBE4069301EMWR-24PK*	4" Downlight (24-Pack)	White	65W	3000K	120V	740	10	080083265527	2405484
HLBE6099301EMWR-12PK*	6" Downlight (12-Pack)	White	70W	3000K	120V	1,025	13	080083265541	2405486
HLBE6099301EMWR-24PK*	6" Downlight (24-Pack)	White	70W	3000K	120V	1,025	13	080083265565	2405486

*HLBE: mounting bar 12 packs sold separately

HALO CANLESS DOWNLIGHTING

HALO CANLESS DOWNLIGHT PRODUCT SELECTION GUIDE



	LT-DM	CJB	RL-DM & RL-DM Night Light	HLA	RA-DM	RL-Slope	LCR	
FEATURES / PERFORMANCE	Fixture Types	Downlights	Slim Downlight with Attached J-box/Driver + 2-in-1 Canless-to-Can Versions Available	Downlights & Downlight + Night Light	Gimbal Adjustables (30° Tilt/360° Rotation)	Gimbal Adjustables (35° Tilt/360° Rotation)	Downlights, Wall Wash, DL + Emergency Battery Backup	
	Sizes (Round)	3", 4", 6"	4", 6"	4", 6"	3", 4"	4", 6"	2", 4", 6", 8"	
	Trim & Lens	Baffle or Smooth w/Flat Lens	Single Step Regressed w/ Flat smooth Lens	Baffle w/Curved Lens (NL has Transparent Trim)	Low-glare Prismatic or Smooth Lens	Baffle w/Flat Lens	Baffle w/Integrated Optic	Smooth w/Flat Lens
	Max Lumens (By size @ 3000K)	570, 645, 785	745, 920	955, 1,300 (Lumen Select, Dedicated) (NL: 780, 1,020)	710	790, 775	960, 1,630	835, 1,295, 3,100, 8,155
	Field SeleCCT Color Temp Switch	3 CCT 27/30/3500K, 30/40/5000K, Dedicated: 3000K	5 CCT 27/30/35/40/5000K	5 CCT w/ D2W D2W/27/30/35/40 5000K (NL: 2000K)	5 CCT 27/30/35/40/5000K	5 CCT w/ D2W D2W/27/30/35/40 5000K	5 CCT 27/30/35 40/5000K	6 CCT 27/30/35/40 50/6500K
CONTROL	Dimming Phase Cut (LE/TE)/0-10V	10% Phase Cut ¹	10% Phase Cut ¹	5% Phase Cut, 0-10V ² (NL: 5% Phase Cut-both zones)	5% Phase Cut	5% Phase Cut	5% Phase Cut	5% Dual-Dim (Phase Cut + 0-10V), 0-10V
	Estimated Life Hours	35K	35K	70K (NL: 50K)	50K	50K	50K	50K
	Input Voltage	120V	120V	120V (NL: 120V)	120V	120V	120V	120-277V
HARDWARE	Fits Mounting Frames	✓	✓	✓	✓	✓	✓	✓
	Decorative Overlays³			✓ (RL-DM only)				✓
	Slide-in-Side™ Wire Traps⁴			✓	✓	✓	✓	✓
	Mounting Bar	✓		✓	✓	✓	✓	✓

¹ LT-DMs are also available in QuickLink Low Voltage (Phase Cut) versions.

² RL-DMs are also available in QuickLink Low Voltage (0-10V) versions.

³ Matte Black, Tuscan Bronze, Satin Nickel, Paintable Matte White.

⁴ Slide-N-Side wire traps eliminate the need to remove knockouts. Pre-wire outside of the j-box, fold down the tab, and insert non-metallic sheathed cable into the Slide-N-Side strain relief.

HALO CANLESS DOWNLIGHTING

RL-DM Recessed Baffle Trim

CANLESS DOWNLIGHT

- The perfect balance of value and visual comfort, now available as a canless direct mount
- Die-cast aluminum baffle trim with curved lens and selectable lumen option
- 6-Position Switch: 5 Color Field-Selectable in 27/30/35/40/5000K + Dim-to-Warm (3000K dims to 1800K)
- LED downlight with remote driver/junction box
- 5% Phase Cut (LE/TE) Dimming, 70,000 hrs, 90+ CRI



Catalog Number	Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
RL4LS9FSD2W1EWHDM	4" Baffle Downlight	White	60-70W	2700K-5000K+D2W	120V	Lumen Select 600-900	11	080083258901	2403141
RL6069FSD2W1EWHDM	6" Baffle Downlight	White	60W	2700K-5000K+D2W	120V	750	7	080083258963	2402947
RL6LS9FSD2W1EWHDM	6" Baffle Downlight	White	60-70W	2700K-5000K+D2W	120V	Lumen Select 900-1,200	14	080083258987	2403144

LT-DM Recessed Baffle & Smooth Splay Trim

CANLESS DOWNLIGHT

- Closely mirrors the RL-DM design, but offers simplified features for maximum savings
- Dead front plastic trim in either baffle or smooth splay with flat lens
- 3 Color Field-Selectable in 27/30/3500K or 30/40/5000K; dedicated in 3000K
- LED downlight with remote driver/junction box
- 10% Phase Cut (LE/TE) Dimming, 35,000 hrs, 90+ CRI




Catalog Number	Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
LT3059FS231EWHDMR	3" Smooth Splay Downlight	White	60W	2700K-5000K	120V	550	7	080083159680	N/A
LT3059FS351EWHDMR	3" Smooth Splay Downlight	White	60W	3000K-5000K	120V	570	7	080083159628	N/A
LTB4069FS351EWHDMR	4" Baffle Downlight	White	60W	3000K-5000K	120V	625	8	080083253456	N/A
LT4069FS231EWHDMR	4" Smooth Splay Downlight	White	60W	2700K-5000K	120V	620	7	080083159925	2374009
LT4069FS351EWHDMR	4" Smooth Splay Downlight	White	60W	3000K-5000K	120V	645	7	080083159642	2374012
LTB6089FS351EWHDMR	6" Baffle Downlight	White	65W	3000K-5000K	120V	745	9	080083253470	N/A
LT6089FS231EWHDMR	6" Smooth Splay Downlight	White	65W	2700K-5000K	120V	765	8	080083159963	2374019
LT6089FS351EWHDMR	6" Smooth Splay Downlight	White	65W	3000K-5000K	120V	785	9	080083159666	2374021

HALO CANLESS DOWNLIGHTING

RLS Slope Recessed Baffle CANLESS DOWNLIGHT

- Tilt the adjustment mechanism from 9° to 45° to match ceiling pitches from 2/12 to 12/12
- Better lighting and improved visual comfort with its integrated optic and regressed light engine
- 5 Color Field-Selectable in 27/30/35/40/5000K
- LED downlight with remote driver/junction box
- 5% Phase Cut (LE/TE) Dimming, 50,000 hrs, 90+ CRI



Catalog Number	Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
RLS409FS1EWHDMR	4" Slope Ceiling Recessed Downlight	White	70W	2700K-5000K	120V	960	9	080083282975	2382794
RLS6159FS1EWHDMR	6" Slope Ceiling Recessed Downlight	White	100W	2700K-5000K	120V	1,630	9	080083282999	2382795

RA-DM Baffle Trim Gimbal CANLESS DOWNLIGHT


- Aim lighting where you want it with 360° of rotations and tilts 35°
- Regressed Baffle trim for increased cutoff
- 6-Position Switch: 5-Color Field-Selectable (27/30/35/40/5000K) + Dim-to-Warm (3000K dims to 1800K)
- LED downlight with remote driver/junction box and mounting hardware included
- 5% Phase Cut (LE/TE) Dimming, 50,000 hrs, 90+ CRI



Catalog Number	Description	Finish	Replaces Up To	Selectable CCT	Voltage	Selectable Lumens	Watts	UPC	Energy Star ID
RA4LS9FSD2W1EWHDM	4" Adjustable Baffle Downlight	White	65W	2700K-5000K + D2W	120V	600-900	9	080083283019	2351865
RA6LS9FSD2W1EWHDM	6" Adjustable Baffle Downlight	White	65W	2700K-5000K + D2W	120V	600-900	9	080083283033	2351876

HLA Adjustable Gimbal CANLESS DOWNLIGHT

- Aim lighting where you want it with 360° of rotations and tilts 30°
- Ideal for shallow plenum spaces - requires only 1-1/2" above the ceiling
- 5 Color Field-Selectable in 27/30/35/40/5000K
- LED downlight with remote driver/junction box
- 5% Phase Cut (LE/TE) Dimming, 50,000 hrs, 90+ CRI



Catalog Number	Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
HLA406FL9FS1EMWR	4" Adjustable Direct Mount	White	60W	2700K-5000K	120V	710	11	080083882960	2341271
HLA406VWL9FS1EMWR	4" Adjustable Direct Mount	White	60W	2700K-5000K	120V	710	11	080083863600	2333844

Don't be left in the Dark!



RL Night Light CANLESS & RECESSED DOWNLIGHTS

- Two Modes: Downlight for general illumination and Night Light for gentle glow (2000K)
- Dead front plastic trim with baffle trim and flat lens
- 6-Position Switch, 5 Color Field-Selectable in 27/30/35/40/5000K + Dim-to-Warm (3000K dims to 1800K), Night Light CCT: Warm glow 2000K
- 5% Phase Cut (LE/TE) Dimming, 50,000 hrs, 90+ CRI



Recessed LED Trims

Canless LED Downlights with remote/driver/junction box

Catalog Number	Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
RLNL4079FSD2W1EWHDM	4" Night Light	White	60W	2700K-5000K+D2W	120V	780	9	080083265039	2403400
RLNL6109FSD2W1EWHDM	6" Night Light	White	60W	2700K-5000K+D2W	120V	1,020	12	080083265053	2403403

Recessed LED Trims with E26 medium socket adapter, and mounting hardware (4"-friction blades and 5/6"-torsion springs & friction blades)

Catalog Number	Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
RLNL4079FSD2W1EWH	4" Night Light	White	65W	2700K-5000K+D2W	120V	775	8	080083268047	2409525
RLNL56109FSD2W1EWH	6" Night Light	White	75W	2700K-5000K+D2W	120V	1,065	11	080083268061	2409524

HALO CANLESS LOW VOLTAGE DOWNLIGHTING

Installing downlights has never been faster.

Power multiple fixtures on the single power supply for easy and efficient lighting installation.

SAVE UP TO **85%** WIRING TIME

QuickLink Low Voltage System



HLB QuickLink Low Voltage (Phase Cut Dimming) CANLESS DOWNLIGHT

- Fixtures twist-connect to low voltage cable, powered by a remote driver/junction box
- Die-cast aluminum with low-glare prismatic lens
- 5 Color Field-Selectable in 27/30/35/40/5000K
- (1) 72W remote power supply & 35-ft of low voltage cable + (4) downlights included



QuickLink Low Voltage System



Catalog Number	Description	Max Fixtures	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts Per	UPC	Energy Star ID
HLBQL4069FS1E-4PK	Kit: (1) Remote Power Supply & 35-ft of cable + (4) 4" HLBQL Fixtures	7	White	60W	2700K-5000K	Driver: 120V Lights: QL LowV	640	8	080083190102	2388203
HLBQL6099FS1E-4PK	Kit: (1) Remote Power Supply & 35-ft of cable + (4) 6" HLBQL Fixtures	6	White	60W	2700K-5000K	Driver: 120V Lights: QL LowV	975	12	080083190126	2388204
HLBQL4069FS1E	(1) 4" HLBQL Fixture*	-	White	60W	2700K-5000K	QL Low Voltage	600	8	080083190188	N/A
HLBQL6099FS1E	(1) 6" HLBQL Fixture*	-	White	60W	2700K-5000K	QL Low Voltage	975	12	080083190218	N/A

*Driver not included. Only compatible with the HALO QuickLink 120V phase cut system.

LT QuickLink Low Voltage (Phase Cut Dimming) RECESSED SMOOTH SPLAY TRIM CANLESS DOWNLIGHT

- Fixtures twist-connect to low voltage cable, powered by a remote driver/junction box
- Dead front plastic trim in either baffle or smooth splay and flat lens
- 5 Color Field-Selectable in 27/30/35/40/5000K
- (1) 72W remote power supply & 35-ft of low voltage cable + (4) downlights included



QuickLink Low Voltage System



Catalog Number	Description	Max Fixtures	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts Per	UPC	Energy Star ID
LTQL4069S1EDM-4PK	Kit: (1) Remote Power Supply & 35-ft of cable + (4) 4" LTQL Fixtures	8	White	60W	2700K-5000K	Driver: 120V Lights: QL LowV	675	8	080083190140	2388205
LTQL6069S1EDM-4PK	Kit: (1) Remote Power Supply & 35-ft of cable + (4) 6" LTQL Fixtures	8	White	60W	2700K-5000K	Driver: 120V Lights: QL LowV	825	8	080083190164	2388206
LTQL4069S1EDM	(1) 4" LTQL Fixture*	-	White	60W	2700K-5000K	QL Low Voltage	675	8	080083190232	N/A
LTQL6069S1EDM	(1) 6" LTQL Fixture*	-	White	60W	2700K-5000K	QL Low Voltage	825	8	080083190256	N/A

*Driver not included. Only compatible with the HALO QuickLink 120V phase cut system.

HALO CANLESS LOW VOLTAGE DOWNLIGHTING

HALO canless commercial downlights with a 120-277V remote driver/ junction box positioned as HALO's light commercial solution for new construction and remodel applications.



HLB QuickLink Low Voltage (0-10V Dimming) SLIM CANLESS DOWNLIGHT

- Fixtures twist-connect to low voltage cable, powered by a remote driver/junction box
- Die-cast aluminum with low-glare prismatic lens
- 5 Color Field-Selectable in 27/30/35/40/5000K
- (1) 90W remote power supply & 40-ft of low voltage cable + (6) downlights included



QuickLink
Low Voltage System



Catalog Number	Description	Max Fixtures	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts Per	UPC	Energy Star ID
HLBQL4069FSE010-6PK	Kit: (1) Remote Power Supply & 40-ft of cable + (6) 4" HLBQL Fixtures	11	White	60W	2700K-5000K	Driver: 120-277V Lights: QL LowV	605	8	080083182206	2388712
HLBQL6099FSE010-6PK	Kit: (1) Remote Power Supply & 40-ft of cable + (6) 6" HLBQL Fixtures	7	White	60W	2700K-5000K	Driver: 120-277V Lights: QL LowV	935	12	080083182220	2388713
HLBQL4069FSE010	(1) 4" HLBQL Fixture* (Commercial)	-	White	60W	2700K-5000K	QL Low Voltage	605	8	080083182367	N/A
HLBQL6099FSE010	(1) 6" HLBQL Fixture* (Commercial)	-	White	60W	2700K-5000K	QL Low Voltage	935	12	080083182381	N/A

*Driver not included. Only compatible with the HALO QuickLink 120-277V system.

RL QuickLink Low Voltage (0-10V Dimming) RECESSED BAFFLE TRIM CANLESS DOWNLIGHT

- Fixtures twist-connect to low voltage cable, powered by a remote driver/junction box
- Die-cast aluminum baffle trim and curved lens
- 5 Color Field-Selectable in 27/30/35/40/5000K
- (1) 90W remote power supply & 50-ft of low voltage cable + (8) downlights included



QuickLink
Low Voltage System



Catalog Number	Description	Max Fixtures	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts Per	UPC	Energy Star ID
RLQL4069SE010DM-8PK	Kit: (1) Remote Power Supply & 50-ft of cable + (8) 4" RLQL Fixtures (Commercial)	13	White	60W	2700K-5000K	Driver: 120-277V Lights: QL LowV	620	7	080083182282	2388378
RLQL6069SE010DM-8PK	Kit: (1) Remote Power Supply & 50-ft of cable + (8) 6" RLQL Fixtures (Commercial)	13	White	60W	2700K-5000K	Driver: 120-277V Lights: QL LowV	665	7	080083182305	2388389
RLQL4069SE010DM	(1) 4" RLQL Fixture* Commercial	-	White	60W	2700K-5000K	QL Low Voltage	620	7	080083182442	N/A
RLQL6069SE010DM	(1) 6" RLQL Fixture* Commercial	-	White	60W	2700K-5000K	QL Low Voltage	665	7	080083182466	N/A

*Driver not included. Only compatible with the HALO QuickLink 120-277V system.

HALO CANLESS DOWNLIGHTING

LCR Light Commercial Series

CANLESS DOWNLIGHT

- Redesigned with dual-dimming, additional CCT selectability and lumen packages, designer trims color options and new wall wash or emergency battery backup versions
- Die-cast aluminum smooth splay trim and flat lens (downlight and wall wash versions)
- 6 Color Field-Selectable in 27/30/35/40/50/6500K
- LED downlight with remote driver/junction box
- 5% Dual Dim: 0-10V or Phase Cut (LE/TE), 50,000 hrs, 90+ CRI



Catalog Number	Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
LCR208RD9FSE020	2" Downlight	White	70W	2700K-6500K	120-277V	835	10	080083259144	2405806
LCR408RD9FSE020	4" Downlight	White	70W	2700K-6500K	120-277V	890	11	080083261505	2405430
LCR412RD9FSE020	4" Downlight	White	75W	2700K-6500K	120-277V	1,295	14	080083261567	2405436
LCR615RD9FSE020	6" Downlight	White	75W	2700K-6500K	120-277V	1,610	18	080083261628	2405442
LCR621RD9FSE020	6" Downlight	White	150W	2700K-6500K	120-277V	2,100	23	080083261680	2405603
LCR630RD9FSE010	6" Downlight	White	150W	2700K-6500K	120-277V	3,100	30	080083261741	2405609
LCR810RD9FSE020	8" Downlight	White	75W	2700K-6500K	120-277V	1,090	12	080083261789	2405807
LCR830RD9FSE010	8" Downlight	White	150W	2700K-6500K	120-277V	3,150	35	080083261826	2405809
LCR850RD9FSE010	8" Downlight	White	150W	2700K-6500K	120-277V	5,180	55	080083261864	2405810
LCR880RD9FSE010	8" Downlight	White	200W	2700K-6500K	120-277V	8,155	92	080083261901	2405812

Catalog Number	Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
LCR408WW9FSE020	4" Wall Wash (Damp-listed)h	White	70W	2700K-6500K	120-277V	835	10	080083259182	2405431
LCR412WW9FSE020	4" Wall Wash (Damp-listed)	White	75W	2700K-6500K	120-277V	1,255	14	080083261543	2405437
LCR615WW9FSE020	6" Wall Wash (Damp-listed)	White	75W	2700K-6500K	120-277V	1,520	18	080083261604	2405598
LCR621WW9FSE020	6" Wall Wash (Damp-listed)	White	150W	2700K-6500K	120-277V	2,125	23	080083261666	2405601
LCR630WW9FSE010	6" Wall Wash (Damp-listed)	White	150W	2700K-6500K	120-277V	2,970	32	080083261727	2405611

Catalog Number	Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
LCR408RD9FSE040	4" Downlight + Emergency Batt.	White	70W	2700K-6500K	120-277V	890	10.7	080083259168	2405429
LCR412RD9FSE040	4" Downlight + Emergency Batt.	White	75W	2700K-6500K	120-277V	1,295	14.4	080083261529	2405434
LCR615RD9FSE040	6" Downlight + Emergency Batt.	White	75W	2700K-6500K	120-277V	1,610	17.5	080083261581	2405442
LCR621RD9FSE040	6" Downlight + Emergency Batt.	White	150W	2700K-6500K	120-277V	2,100	23	080083261642	2405601
LCR630RD9FSE040	6" Downlight + Emergency Batt.	White	150W	2700K-6500K	120-277V	3,100	31.6	080083261703	2405607
LCR810RD9FSE040	8" Downlight + Emergency Batt.	White	75W	2700K-6500K	120-277V	1,090	12	080083261765	2405800
LCR830RD9FSE040	8" Downlight + Emergency Batt.	White	150W	2700K-6500K	120-277V	3,150	33	080083261802	2405809
LCR850RD9FSE040	8" Downlight + Emergency Batt.	White	150W	2700K-6500K	120-277V	5,180	50	080083261840	2405802
LCR880RD9FSE040	8" Downlight + Emergency Batt.	White	200W	2700K-6500K	120-277V	8,155	92	080083261888	2405812

HALO CANLESS DOWNLIGHTING

CJB Integrated JBox CANLESS DOWNLIGHT

- Slim design 4" and 6" LED recessed downlights for easy installation from below the ceiling
- 2-in-1 installation for either canless or LED trim retrofit
- 4" delivers 600 lumens; 6" delivers 900 lumens
- 5 Color Field-Selectable in 27/30/35/40/5000K
- 10% Phase Cut Dimming (LE/TE), 35K hrs, 90+ CRI



2 in 1
installation



Catalog Number	Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
CJB4069FS1EMW	4" Downlight, Canless Only	White	40W	2700K-5000K	120V	600	8	080083266234	2508445
CJB6099FS1EMW	6" Downlight, Canless Only	White	60W	2700K-5000K	120V	900	9	080083266258	2508446
CJB4069FS1EMWR	4" Downlight, 2-in-1 Install	White	40W	2700K-5000K	120V	600	8	080083266470	Pending
CJB6099FS1EMWR	6" Downlight, 2-in-1 Install	White	60W	2700K-5000K	120V	900	9	080083266494	Pending
CJB4069FS1EMW-6PK	4" Downlight (6-Pack), Canless Only	White	40W	2700K-5000K	120V	600	8	080083266272	2508445
CJB6099FS1EMW-6PK	6" Downlight (6-Pack), Canless Only	White	60W	2700K-5000K	120V	900	9	080083266296	2508446
CJB4069FS1EMWR-6PK	4" Downlight, 2-in-1 Install (6-Pack)	White	40W	2700K-5000K	120V	600	8	080083266517	Pending
CJB6099FS1EMWR-6PK	6" Downlight, 2-in-1 Install (6-Pack)	White	60W	2700K-5000K	120V	900	9	080083266531	Pending
CJB4069FS1EMW-12PK	4" Downlight (12-Pack), Canless Only	White	40W	2700K-5000K	120V	600	8	080083266418	2508445
CJB6099FS1EMW-12PK	6" Downlight (12-Pack), Canless Only	White	60W	2700K-5000K	120V	900	9	080083266432	2508446
CJB4069FS1EMWR-12P	4" Downlight, 2-in-1 Install (12-Pack)	White	40W	2700K-6500K	120V	600	8	080083266555	Pending
CJB6099FS1EMWR-12P	6" Downlight, 2-in-1 Install (12-Pack)	White	60W	2700K-6500K	120V	900	9	080083266579	Pending

HALO® Remodel Solutions

Go Faster! with HALO Canless EZ-Trim

1 FASTER INSTALLATION

Lower installation costs than the traditional HALO remodeling housing

2 FEWER COMPONENTS

Easier ordering and less boxes than the traditional HALO remodeling housing

3 COMPLETE SELECTION

3, 4, 6-inch and shallow options

[Click to watch installation video](#)

EZ-Trim CANLESS DOWNLIGHT



4-inch | GU10 lamp | E26 lamp



6-inch | GU24 lamp | E26 lamp



6-inch, shallow | GU24 lamp | E26 lamp




Catalog Number	Description	Finish	Lamp Base	UPC
CEZ4125GU10WBICAT	4" Canless EZ-Trim	White	GU10	080083175536
CEZ4125E26WBICAT	4" Canless EZ-Trim	White	E26	080083175550
CEZ6125E26WBICAT	6" Canless EZ-Trim	White	E26	080083176212
CEZ6125GU24WBICAT	6" Canless EZ-Trim	White	GU24	080083175574
CEZ6126E26WBICAT	6" Canless EZ-Trim, Shallow	White	E26	080083176236
CEZ6126GU24WBICAT	6" Canless EZ-Trim, Shallow	White	GU24	080083175598

HALO[®] SURFACE MOUNT DOWNLIGHTING

Suitable for a variety of applications!

- Below the ceiling installation with no plates or clips required
- Designed for square, octagon, pancake or round junction boxes
- Ideal for closets, storage areas, attics and basements

Quick and Easy Installation



HALO SURFACE MOUNT DOWNLIGHT PRODUCT SELECTION GUIDE

Good Better Best



		HLCE	HLS	BLD	JBD	SMD	SLD
FEATURES/PERFORMANCE	Size / Shape	4", 6" Round	6", 9" Round	4", 6" Round	4" Round, Square	4", 6", 12" Round, Square	4", 6" Round
	Trim & Lens	Curved	Curved	Curved	Interchangeable Square, Round or Full Lens Diffuser	Squared Edge Flat	Low-glare Prismatic Flat Lens
	Max Lumens (By size @ 3000K)	965	945, 1,330	800	715	740, 790, 2,240	635, 1,300
	Field SeleCCT Color Temp Switch	Dedicated 3000K	Dedicated 3000K, 4000K	5 CCT 27/30/35 40/5000K	5 CCT 27/30/35 40/5000K	5 CCT 27/30/35 40/5000K	5 CCT 27/30/35 40/5000K
CONTROL	Dimming Phase Cut (LE/TE) ¹	10%	10%	5%	5%	5%	5%
	Estimated Life Hours	35K	35K	50K	50K	50K	50K
	Input Voltage	120V	120V	120V	120V	120V, 120-277V	120V, 120-277V
HARDWARE	Decorative Overlays ¹				✓	✓	

¹ Matte Black, Tuscan Bronze, Satin Nickel, Paintable Matte White.

HALO SURFACE MOUNT DOWNLIGHTING

SLD Beveled Edge SURFACE MOUNT DOWNLIGHT

- Low profile surface mount downlight with sleek beveled edge and glare-reducing flat lens
- Ceiling or wall mounting in compatible junction boxes or retrofit into recessed housings
- 5 Color Field-Selectable in 27/30/35/40/5000K
- LED Downlight, supply wire adapter, quick wiring connector and mounting hardware included
- 5% Dimming (Phase Cut or 0-10V), 50,000 hrs, 90+ CRI



Catalog Number	Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
SLDSL4069S1EMWR	4" Surface Downlight	White	60W	2700K-5000K	120V	635	9	080083153107	2366149
SLDSL6069S1EMWR	6" Surface Downlight	White	60W	2700K-5000K	120V	635	9	080083153121	2366163
SLD6129S1EMWR	6" Surface Downlight	White	75W	2700K-5000K	120V	1,300	15	080083153145	2373952
SLD6129SE010MWR	6" Surface Downlight, (0-10V)	White	75W	2700K-5000K	120-277V	1,300	15	080083153169	2373954
SLDACCKIT	4" and 6" SLD Accessory Kit	N/A	N/A	N/A	N/A	N/A	N/A	080083159819	2373954

SMD Square Edge SURFACE MOUNT DOWNLIGHT

- Round or square surface mount downlight with squared edge design
- Ceiling or wall mounting in compatible junction boxes or retrofit into recessed housings
- 5 Color Field-Selectable in 27/30/35/40/5000K
- LED Downlight, supply wire adapter, quick wiring connector, mounting hardware and retrofit kit included
- 5% Dimming (Phase Cut or 0-10V), 50,000 hrs, 90+ CRI



Catalog Number	Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
SMD4R69SWH	4" Surface Mount, Round	White	65W	2700K-5000K	120V	735	9	080083020904	2365919
SMD4S69SWH	4" Surface Mount, Square	White	65W	2700K-5000K	120V	740	9	080083020928	2365921
SMD6R69SWH	6" Surface Mount, Round	White	65W	2700K-5000K	120V	755	9	080083020942	2365923
SMD6S69SWH	6" Surface Mount, Square	White	65W	2700K-5000K	120V	790	9	080083020966	2366348
SMD12R209SWHE	12" Surface Mount, Round, (0-10V)	White	150W	2700K-5000K	120-277V	2,240	27	080083138005	N/A

BLD Curved and Beveled SURFACE MOUNT DOWNLIGHT

- Traditional surface downlight look with its curved lens with beveled trim
- Below the ceiling installation, installs in most 3-1/2" or 4" ceiling junction and pancake boxes
- 5 Color Field-Selectable in 27/30/35/40/5000K
- LED Downlight and j-box mounting hardware included
- 5% Phase Cut (LE/TE) Dimming, 50,000 hrs, 90+ CRI



Catalog Number	Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
BLD4089SWHR	4" Surface Downlight	White	65W	2700K-5000K	120V	800	10	080083826766	2362340
BLD6089SWHR	6" Surface Downlight	White	65W	2700K-5000K	120V	800	10	080083826803	2319364

HALO SURFACE MOUNT DOWNLIGHTING

JBD Slim Series SURFACE MOUNT DOWNLIGHT

- Low profile surface mount downlight with smooth flat lens
- Ceiling or wall mounting in compatible 40 junction boxes
- Interchangeable round, square, and full-lensed designer trims in multiple finishes
- 5 Color Field-Selectable in 27/30/35/40/5000K
- LED Downlight, supply wire adapter, quick wiring connector and mounting hardware included
- 5% Dimming (Phase Cut), 50,000 hrs, 90+ CRI



Catalog Number	Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
JBD4079FS1EWH	4" Light w/ Matte White Trim	White	60W	2700K-5000K	120V	715	10	080083283514	2567962
JBD4079FS1EWH-CA	4" Light w/ Matte White Trim, CA T20	White	60W	2700K-5000K	120V	715	10	080083285631	Pending

Accessories (optional)

Catalog Number	Description	Finish	UPC
JBD4TRMMW	4" Round Trim	Matte White	080083283538
JBD4TRMMB	4" Round Trim	Matte Black	080083283590
JBD4TRMSN	4" Round Trim	Satin Nickel	080083283552
JBD4TRMTBZ	4" Round Trim	Tuscan Bronze	080083283576
JBD4STRMMW	4" Square Trim	Matte White	080083285679
JBD4STRMMB	4" Square Trim	Matte Black	080083285730
JBD4STRMSN	4" Square Trim	Satin Nickel	080083285693
JBD4STRMTBZ	4" Square Trim	Tuscan Bronze	080083285716
JBD4TRMMWB	4" Round Trim, Baffle	Matte White	080083291311
JBD4TRMMBB	4" Round Trim, Baffle	Matte Black	080083291373
JBD4TRMSNB	4" Round Trim, Baffle	Satin Nickel	080083291335
JBD4TRMTBZB	4" Round Trim, Baffle	Tuscan Bronze	080083291359
JBD4STRMMWB	4" Square Trim, Baffle	Matte White	080083291397
JBD4STRMMBB	4" Square Trim, Baffle	Matte Black	080083291458
JBD4STRMSNB	4" Square Trim, Baffle	Satin Nickel	080083291410
JBD4STRMTBZB	4" Square Trim, Baffle	Tuscan Bronze	080083291434
JBD4DIFF	4" Full Lens Diffuser	Diffuser	080083283613



FM Series FLUSHMOUNT

- LED flushmount installs in most 3-1/2" or 4" junction boxes or retrofits 5" and 6" recessed housings.
- Round die formed lens design with 360-degrees of light distribution
- 3 Color Field-Selectable in 30/40/5000K (8" fixture) or 5 Color Field-Selectable in 27/30/35/40/5000K (11" & 15" fixtures)
- 10% Dimming, 50,000 hrs, 90+ CRI



Catalog Number	Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
FM89S1EWHR	8" Flushmount	White	60W	3000K-5000K	120V	920	10	080083256587	2399871
FM119S1EWHR	11" Flushmount	White	75W	2700K-5000K	120V	1,250	18	080083257706	2399874
FM159S1EWHR	15" Flushmount	White	100W	2700K-5000K	120V	1,510	14	080083257720	2399877

HALO SURFACE MOUNT DOWNLIGHTING

HLCE Disk SURFACE MOUNT DOWNLIGHT

- Damp-rated ultra-thin surface mount disk downlight with fast installation
- Installs in most 3-1/2" or 4" ceiling junction and pancake boxes
- Available in dedicated 3000K only
- LED Downlight, j-box mounting hardware, and recessed housing retrofit kit included
- 10% Phase Cut (LE/TE) Dimming, 50,000 hrs, 90+ CRI



Catalog Number	Description	Finish	Replaces Up To	CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
HLCE4079301EWH-12P	4" Surface Mount Disc Light (Damp-listed) (12-Pack)	White	70W	3000K	120V	822	11	080083276806	Pending
HLCE4079301EWH-18P	4" Surface Mount Disc Light (Damp-listed) (18-Pack)	White	70W	3000K	120V	822	11	080083276844	Pending
HLCE6099301EWH-12P	6" Surface Mount Disc Light (Damp-listed) (12-Pack)	White	75W	3000K	120V	965	13.6	080083276820	Pending
HLCE6099301EWH-18P	6" Surface Mount Disc Light (Damp-listed) (18-Pack)	White	75W	3000K	120V	965	13.6	080083276868	Pending
HLCE407930-6P-CA	4" Surface Mount Disc Light (Damp-listed) (6-Pack), CA T20	White	70W	3000K	120V	822	11	080083281008	Pending
HLCE407930-12P-CA	4" Surface Mount Disc Light (Damp-listed) (12-Pack), CA T20	White	70W	3000K	120V	822	11	080083276882	Pending
HLCE407930-18P-CA	4" Surface Mount Disc Light (Damp-listed) (18-Pack), CA T20	White	70W	3000K	120V	822	11	080083276929	Pending
HLCE609930-6P-CA	6" Surface Mount Disc Light (Damp-listed) (6-Pack), CA T20	White	75W	3000K	120V	965	13.6	080083281022	Pending
HLCE609930-12P-CA	6" Surface Mount Disc Light (Damp-listed) (12-Pack), CA T20	White	75W	3000K	120V	965	13.6	080083276905	Pending
HLCE609930-18P-CA	6" Surface Mount Disc Light (Damp-listed) (18-Pack), CA T20	White	75W	3000K	120V	965	13.6	080083276943	Pending

HLS Disk SURFACE MOUNT DOWNLIGHT

- Wet-rated ultra-thin surface mount disk with chamfered rim and motion sensing in 9" version
- Below the ceiling installs in most 3-1/2" or 4" ceiling junction and pancake boxes
- Dedicated CCT: 3000K or 4000K
- LED Downlight, j-box mounting hardware, and recessed housing retrofit kit included
- 10% Phase Cut (LE/TE) Dimming, 50,000 hrs, 90+ CRI




Catalog Number	Description	Finish	Replaces Up To	CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
HLS6099301EWH-6BP	6" Disc Light (6-Pack)	White	70W	3000K	120V	925	16	080083256785	Pending
HLS6099301EWH-12BP	6" Disc Light (12-Pack)	White	70W	3000K	120V	925	16	080083256846	Pending
HLS6099401EWH-6BP	6" Disc Light (6-Pack)	White	70W	4000K	120V	945	16	080083256808	Pending
HLS9129301EWH	9" Disc Light	White	75W	3000K	120V	1,245	18	080083256907	2401113
HLS9129401EWH	9" Disc Light	White	75W	4000K	120V	1,295	18	080083256921	2401111
HLSMS9129301EWH	9" Disc Light, Motion Sensor	White	75W	3000K	120V	1,265	18	080083256969	2401115
HLSMS9129401EWH	9" Disc Light, Motion Sensor	White	75W	4000K	120V	1,330	18	080083256983	2401119
HLS6099301EWH-6BP-CA	6" Disc Light (6-Pack), CA T20	White	70W	3000K	120V	925	16	080083257164	Pending
HLS6099301EWH-12BP-CA	6" Disc Light (12-Pack), CA T20	White	70W	3000K	120V	925	16	080083257225	Pending
HLS6099401EWH-6BP-CA	6" Disc Light (6-Pack), CA T20	White	70W	4000K	120V	945	16	080083257188	Pending
HLS9129301EWH-CA	9" Disc Light, CA T20	White	75W	3000K	120V	1,245	18	080083257287	Pending
HLS9129401EWH-CA	9" Disc Light, CA T20	White	75W	4000K	120V	1,295	18	080083257300	Pending
HLSMS9129301EWH-CA	9" Disc Light, Motion Sensor, CA T20	White	75W	3000K	120V	1,265	18	080083257348	Pending
HLSMS9129401EWH-CA	9" Disc Light, Motion Sensor, CA T20	White	75W	4000K	120V	1,330	18	080083257362	Pending

HALO[®] RECESSED LED TRIMS

Maximum energy savings with easy installation

- Compatible with most recessed housings and sizes
- Suitable for new construction and remodel
- Replaces traditional incandescent lighting

Quick and Easy Installation



HALO RECESSED LED TRIM PRODUCT SELECTION GUIDE

Good Better Best



		LT	LA	RL	RL Night Light	RA	RSQ
FEATURES / PERFORMANCE	LED Trim Type	Downlights	Gimbal Adjustables (35° Tilt/360° Rotation)	Downlights	Downlights	Gimbal Adjustables (35° Tilt/360° Rotation)	Square Downlights
	Size & Shape	4", 5/6" Round	4", 5/6" Round	3", 4", 5/6" Round	4", 5/6" Round	4", 5/6" Round	4", 5", 6" Square
	Trim & Lens	Baffle or Smooth w/ Flat Lens	Baffle w/ Flat Lens	Baffle w/ Curved Lens	Baffle w/ Curved Lens + Transparent Trim	Baffle w/ Flat Lens	Baffle w/ Flat Lens
	Max Lumens (By size @ 3000K)	570, 645, 785	955, 1,300 (Lumen Select, Dedicated)	780, 1,020	775, 1,065	710	790, 775
	Field SeleCCT Color Temp Switch	5 CCT 27/30/35/40/5000K 3 CCT 27/30/3500K or 30/40/50K Dedicated: 3000K	Dedicated 3000K	5 CCT w/ D2W D2W 27/30/35/40 5000K	5 CCT w/ D2W D2W/27/30/35 40/5000K + Night Light (2000K)	5 CCT w/ D2W D2W 27/30/35/40 5000K	5 CCT 27/30/35 40/5000K
CONTROL	Dimming Phase Cut (LE/TE)	10%	10%	5% ¹	5% (Both Zones)	5%	5%
	Estimated Life Hours	50K	35K	70K	50K	50K	50K
	Input Voltage	120V	120V	120V	120V	120V	120V
HARDWARE	Decorative Overlays²			✓			✓

¹ RL LED Trims are also available in Smart Wi-Fi Connected by WiZ Pro versions

² Matte Black, Tuscan Bronze, Satin Nickel, Paintable Matte White

RL Recessed Baffle

LED TRIMS

- Delivers long life, exceptional performance, and installs into almost any recessed housing
- The die-cast aluminum baffle trim reduces glare and provides a traditional downlight appearance
- 6-Position Switch: 5 Color Field-Selectable in 27/30/35/40/5000K + Dim-to-Warm (3000K dims to 1800K)
- Includes LED Trim, E26 medium socket adapter and mounting hardware (3" & 4"-friction blades and 5/6"-torsion springs & friction blades)
- 5% Phase Cut (LE/TE) Dimming, 70,000 hrs, 90+ CRI



Catalog Number	Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
RL3059FSD2W1EWH	3" Baffle Trim	White	60W	2700K-5000K+D2W	120V	610	8	080083257669	2402944
RL4LS9FSD2W1EWH	4" Baffle Trim	White	60-70W	2700K-5000K+D2W	120V	Lumen Select 600-900	9	080083257683	2402940
RL56069FSD2W1EWH	5/6" Baffle Trim	White	60W	2700K-5000K+D2W	120V	700	8	080083818525	2356074
RL56LS9FSD2W1EWH	5/6" Baffle Trim	White	60-75W	2700K-5000K+D2W	120V	Lumen Select 900-1,200	12	080083818549	2354587

LT Recessed Baffle or Smooth Splay

LED TRIMS

- The LT LED trims offer a cost-saving alternative to the RL Series that retrofit into recessed housings
- Dead-front plastic fixture with either baffle or smooth splay trims and smooth flat lens
- Available in 3 or 5 Color Field-Selectable or Dedicated 3000K
- Includes E26 medium socket adapter and mounting hardware (4"-friction blades; 5/6"-torsion springs only fit housings with spring receivers)
- 10% Phase Cut (LE/TE) Dimming, 50,000 hrs, 90+ CRI



Selectable 5-CCT

Catalog Number	Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
LT4069FS1EWH	4" Baffle Trim	White	60W	2700K-5000K	120V	680	7	080083276776	2508121
LT4099FS1EWH	4" Baffle Trim	White	60W	2700K-5000K	120V	1030	9	080083277315	2508243
LT56079FS1EWH	5/6" Baffle Trim	White	60W	2700K-5000K	120V	805	7	080083277353	2508127
LT56129FS1EWH	5/6" Baffle Trim	White	75W	2700K-5000K	120V	1345	12	080083277391	2508244

Dedicated CCT & Lumens

Catalog Number	Description	Finish	Replaces Up To	CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
LT460WH6930R	4" Baffle Trim	White	60W	3000K	120V	620	8	080083746163	2309297
LT460WH6930R-CA	4" Baffle Trim, CA T20	White	60W	3000K	120V	665	7	080083900893	2257770, 2277227
LT560WH6930R	5/6" Baffle Trim	White	60W	3000K	120V	750	10	080083746187	2309300
LT560WH6930R-CA	5/6" Baffle Trim, CA T20	White	60W	3000K	120V	745	8	080083900954	2252183, 2277232

HALO RECESSED LED TRIMS

RA Baffle Adjustable Gimbal

CANLESS ADJUSTABLE

- Adjustable retrofit with 360° of rotation and 35° tilt
- Regressed die-cast aluminum baffle trim reduces glare and improves cutoff
- 6-Position Switch: 5-Color Field-Selectable (27/30/35/40/5000K) + Dim-to-Warm (3000K dims to 1800K)
- Adjustable LED Trim, E26 medium socket adapter, and mounting hardware included
- 5% Phase Cut (LE/TE) Dimming, 50,000 hrs, 90+ CRI



Catalog Number	Description	Finish	Replaces Up To	Selectable CCT	Voltage	Selectable Lumens	Watts	UPC	Energy Star ID
RA4LS9FSD2W1EWH	4" Adjustable Gimbal Trim	White	60W	2700K-5000K + D2W	120V	600-900	9	080083282975	2567964
RA56LS9FSD2W1EWH	5/6" Adjustable Gimbal Trim	White	60W	2700K-5000K + D2W	120V	600-900	9	080083282999	2567965

LA Baffle Adjustable Gimbal

CANLESS ADJUSTABLE

- Adjustable retrofit with 360° of rotation and 35° tilt
- Regressed dead front plastic baffle trim for increased cutoff and maximum adjustability
- Available in dedicated 3000K only
- Adjustable LED Trim, E26 medium socket adapter, and mounting hardware included
- 10% Phase Cut (LE/TE) Dimming, 35,000 hrs, 90+ CRI



Catalog Number	Description	Finish	Replaces Up To	CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
LA4069301EWH	4" Adjustable Gimbal Trim	White	60W	3000K	120V	610	9	080083818143	2325616
LA56069301EWH	5/6" Adjustable Gimbal Trim	White	60W	3000K	120V	635	9	080083818242	2325606

RSQ Square Recessed Baffle

TRIMS

- Provides integrated LED trims with a square baffle trim and lens
- Features die-cast aluminum square baffle trim and flat lens
- 5 Color Field-Selectable in 27/30/35/40/5000K
- Adjustable LED Trim, E26 medium socket adapter, and mounting hardware included
- 5% Phase Cut (LE/TE) Dimming, 50,000 hrs, 90+ CRI



Catalog Number	Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
RSQ4089FS1EMWWB	4" Square Baffle Trim	White	65W	2700K-5000K	120V	830	10	080083824496	2333094
RSQ5089FS1EMWWB	5" Square Baffle Trim	White	70W	2700K-5000K	120V	830	10	080083824595	2333267
RSQ6089FS1EMWWB	6" Square Baffle Trim	White	70W	2700K-5000K	120V	860	10	080083824694	2333093

HALO Housing Contractor Packs

HALO Housing Contractor Pack quantities are quick, convenient and easy to order.

E Series Housings

Compact and efficient housings for new or retrofit residential or light commercial construction.

- Ideal for residential and light commercial applications
- Compatible with Recessed LED Trims or E26 socket-based lamps
- Optimized and listed for EISA compliant tungsten-halogen lamps along with incandescent, CFL, and LED lamps with E26 bases
- For installation in insulated (IC) and non-IC rated ceilings
- Available in 120V or 120-277V configurations



Catalog Number*	Description	Socket	Voltage	Qty Per Single Catalog Number	Qty of Cartons	UPC
E4ICATSB-60	4", IC, Shallow, New Construction	E26	120V	60 Housings	15 cartons	080083253968
E5ICATNB-60	5" IC, Air-Tite, New Construction, No Socket Bracket	E26	120V	60 Housings	10 cartons	080083254071
E27ICAT-60	6", IC, Shallow, New Construction	E26	120V	60 Housings	10 cartons	080083254064
E750ICAT-60	6" IC, Air-Tite, LED New Construction	LED Quick Connect (No Socket)	120-277V	60 Housings	10 cartons	080083254033
E7ICAT-60	6" IC, Air-Tite, New Construction	E26	120V	60 Housings	10 cartons	080083253944
E7ICATNB-60	6" IC, Air-Tite, New Construction, No Socket Bracket	E26	120V	60 Housings	10 cartons	080083253951
E7RICAT-60	6" IC, Air-Tite, Remodel	E26	120V	60 Housings	10 cartons	080083254019

*Only order 1 unit for catalog numbers above. Each catalog number represents 60 housings.

H Series Housings

The industry standard recessed housing for commercial and residential applications.

- Ideal for commercial and residential applications
- Compatible with Recessed LED Trims or E26 socket-based lamps
- Optimized and listed for EISA compliant tungsten-halogen lamps along with incandescent, CFL, and LED lamps with E26 bases
- For installation in insulated (IC) and non-IC rated ceilings
- Available in 120V or 120-277V configurations



Catalog Number*	Description	Socket	Voltage	Qty Per Single Catalog Number	Qty of Cartons	UPC
H245ICAT-60	4" New Construction Ultra Shallow	LED Quick Connect (No Socket)	120-277V	60 Housings	15 cartons	080083253982
H245RICAT-60	4" Remodel Ultra Shallow	LED Quick Connect (No Socket)	120-277V	60 Housings	15 cartons	080083254057
H995ICAT-60	4" New Construction, IC Air-Tite, Shallow	LED Quick Connect (No Socket)	120-277V	60 Housings	10 cartons	080083254040
H99ICAT-60	4" New Construction, IC Air-Tite, Shallow	E26	120V	60 Housings	10 cartons	080083254002
H750ICAT-60	6" New Construction, IC Air-Tite	LED Quick Connect (No Socket)	120-277V	60 Housings	10 cartons	080083254026
H7ICAT-60	6" New Construction, IC Air-Tite	E26	120V	60 Housings	10 cartons	080083253975
H7ICATNB-60	6" New Construction, IC Air-Tite, No Socket Bracket	E26	120V	60 Housings	10 cartons	080083253999
H7ICT-60	6" New Construction, IC	E26	120V	60 Housings	10 cartons	080083254088

*Only order 1 unit for catalog numbers above. Each catalog number represents 60 housings.

Traditional Recessed Trims

4", 5" AND 6"

- Traditional recessed trims install into recessed housings, are offered in a variety of styles, and accept different lamp types
- Trims shape light to minimize glare and reduce ceiling brightness
- Open trims focus the downlighting beam to provide uniform distribution
- Can be used in new construction or remodel housings



Catalog Number	Description	Finish	Lamp Source	UPC
4001WB	4" Step Baffle - Plastic	White	Halogen, INC, LED, CFL	080083745869
993W	4" Coilex Baffle	White	Halogen, INC, LED, CFL	080083628483
5001P	5" Metal Splay Baffle	White	Halogen, INC, LED, CFL	662400602729
5125WB	5" Full Cone Baffle	White	Halogen, INC, LED, CFL	080083743162
300P	6" Open - Socket Supporting	White	Halogen, INC, LED, CFL	662400302421
30WAT	6" Air-Tite Baffle	White	Halogen, INC, LED, CFL	662400603320
310W	6" Coilex Baffle	White	Halogen, INC, LED, CFL	080083515882
456W	6" Baffle for Slope Ceiling	White	Halogen, INC, LED, CFL	662400676287
6100WB	6" Tapered Metal Baffle, 2-Rings Narrow & Wide	White	Halogen, INC, LED, CFL	080083743452
6125WB	6" Full Cone Baffle	White	Halogen, INC, LED, CFL	080083754465



HALO UNDER CABINET




Sleek and Seamless

This low-profile design remains invisible to the eye while providing uniform illumination on the task. With maximum energy savings and contractor friendly installation features, the HU11 series is ideal for commercial and residential projects.

HU11 LED Under Cabinet

Selectable CCT

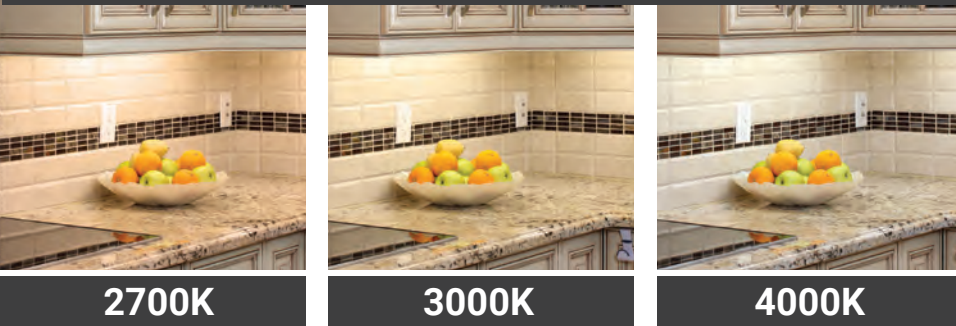


With a simple slide of the SeleCCTable color temperature switch, users have the flexibility to choose between 2700K, 3000K and 4000K CCT to customize the color temperature to suit their specific lighting need.

HU11 Under Cabinet

9", 18", 24" AND 36"

- Sleek, low-profile LED under cabinet with less than 1" profile
- 3 Color Field-Selectable options 2700K/3000K/4000K
- 5% Phase Cut (LE/TE) Dimming, 90+ CRI

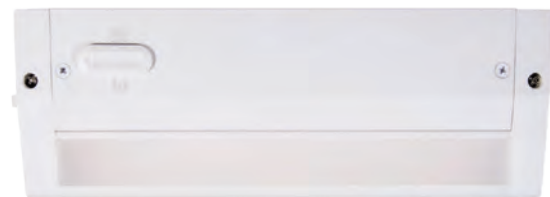

Catalog Number	Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
HU1109D9SP	9" Under Cabinet	White	17W INC	2700K-4000K	120V	300	5	080083875788	2341224
HU1118D9SP	18" Under Cabinet	White	33W INC	2700K-4000K	120V	560	8	080083875863	2341217
HU1124D9SP	24" Under Cabinet	White	44W INC	2700K-4000K	120V	785	11	080083875948	2341218
HU1136D9SP	36" Under Cabinet	White	56W INC	2700K-4000K	120V	1,125	16	080083876020	2341219

Live Smarter in **Full Color**



Wireless Dimming



Wet or Damp Locations



Standard E26 Base



Shows Natural Colors



Wi-Fi Connected



Very Wide Angle



Circadian Rhythm



16 Million Colors



Tunable White



HALO is now available with **WiZ Pro!**

Illuminate spaces with the perfect lighting. Set the mood with 16 million colors + white tuning using the WiZ App or preferred compatible voice assistant.

WiZ Pro also provides features and tools installers need to setup and manage multiple projects with speed and efficiency.



DIY SETUP

Anyone can claim and control lights over Wi-Fi using the WiZ App.



PRO SETUP

The WiZ Pro Setup App allows installers to do pre-Wi-Fi claiming, manage multiple projects and access the WiZ Pro Dashboard for more advanced features.



WIZclick FEATURE

Toggle your switch to change between 2 scenes

Integrations



RL Smart Wi-Fi Recessed Baffle LED TRIM (CONNECTED BY WIZ PRO)

- Set up from the WiZ app to wirelessly control lighting temperature, color, dimming and scenes along with home automation
- Fixtures provide 16 million colors and tunable white light from 2200-6500K
- LED downlight with remote driver/junction box and mounting hardware included
- Wi-Fi Control and Dimming to 5% via WiZ App, 50,000 hrs, 90+ CRI



Catalog Number	Description	Finish	Selectable CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
RL4069WZRGBWWHR	4" Smart Wi-Fi Baffle Trim (WiZ Pro)	White	Full Color & Tunable White (2200-6500K)	120V	615	8	080083256167	Pending
RL56069WZRGBWWHR	5/6" Smart Wi-Fi Baffle Trim (WiZ Pro)	White	Full Color & Tunable White (2200-6500K)	120V	690	8	080083256143	Pending

HLB Smart Wi-Fi Slim CANLESS LED DOWNLIGHTS (CONNECTED BY WIZ PRO)

- Set up from the WiZ app to wirelessly control lighting temperature, color, dimming and scenes along with home automation
- Fixtures provide 16 million colors and tunable white light from 2200-6500K
- LED downlight with remote driver/junction box and mounting hardware included
- Wi-Fi Control and Dimming to 5% via WiZ App, 50,000 hrs, 90+ CRI



Catalog Number	Description	Finish	Selectable CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
HLB4069WZRGBWMWR	4" Smart Wi-Fi Downlight (WiZ Pro)	White	Full Color & Tunable White (2200-6500K)	120V	600	9	080083255955	2408244
HLB6099WZRGBWMWR	6" Smart Wi-Fi Downlight (WiZ Pro)	White	Full Color & Tunable White (2200-6500K)	120V	960	12	080083255931	2408245

ESF Smart Wi-Fi Floodlight OUTDOOR SECURITY (CONNECTED BY WIZ PRO)

- Set up from the WiZ app to wirelessly control lighting temperature, color, dimming and scenes along with home automation
- Fixtures provide 16 million colors and tunable white light from 2200-6500K
- LED floodlight with minimal design, perfect for security and ambiance outdoors
- WiFi Control and Dimming via WiZ app, 50,000 hrs, wet location rated, up to 2000 lumens



Catalog Number	Description	Finish	Selectable CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
ESF2ARGBWFB-WiZ	4" Smart Wi-Fi Baffle Trim (WiZ Pro)	Black	Full Color & Tunable White (2200-6500K)	120V	2200	28	080083260300	Pending
ESF2ARGBFW-WiZ	5/6" Smart Wi-Fi Baffle Trim (WiZ Pro)	White	Full Color & Tunable White (2200-6500K)	120V	2200	28	080083260324	Pending



PR Series
Downlights
p. 33-35



HC Series
Downlights
p. 33-35

HALO[®] COMMERCIAL LED DOWNLIGHTS

Commercial LED Lighting provides the right balance of visual comfort and energy efficiency, with proven and tested products that always meet commercial code and never break the budget.

HALO COMMERCIAL DOWNLIGHTING

PR4 SeleCCTable™ Series

DOWNLIGHT

- 4-inch LED self-flanged, lensed recessed downlight
- Available in new construction and retrofit
- Field-Selectable lumens: 1,000, 1,500, 2,000
- 3 Color Selectable in 30/35/4000K; 80 CRI
- Exclusive medium / wide beam distribution reversible flip lens



Rapid Response



Catalog Number	Description	Finish	Replaces Up To	Selectable CCT	Voltage	Selectable Lumens	Watts	UPC	Energy Star ID
PR4FS12D010	4" Housing	Raw Finish	18W-32W CFL	N/A	120-277V	1,000-2,000	20	080083131839	2353549
PR4M12MD8FSMW	4" LED Module	Matte White	18W-32W CFL	3000K-4000K	120-277V	1,000-2,000	N/A	080083060795	2353549
PR4RFS12D010	4" Retrofit Kit	Raw Finish	18W-32W CFL	N/A	120-277V	1,000-2,000	22	080083132683	2353549

Complete downlight includes housing or retrofit kit + LED Module.

PR6 SeleCCTable™ Series

DOWNLIGHT

- 6-inch LED self-flanged, lensed recessed downlight
- Available in new construction and retrofit
- Field selectable lumens: 1,000, 1,500, 2,000
- 3 Color Selectable in 30/35/4000K; 80 CRI
- Medium / wide beam distribution lens options included



Rapid Response



Catalog Number	Description	Finish	Replaces Up To	Selectable CCT	Voltage	Selectable Lumens	Watts	UPC	Energy Star ID
PR6FS12D010	6" Housing	Raw Finish	18W-32W CFL	N/A	120/277V	1,000-2,000	21	080083892174	2328770
PR6M12MD8FSMW	6" LED Module	Matte White	18W-32W CFL	3000K-4000K	N/A	1,000-2,000	N/A	080083891122	2345484
PR6RFS12D010	6" Retrofit Kit	Raw Finish	18W-32W CFL	N/A	120V-277V	1,000-2,000	22	080083891726	2345457, 2345484

Complete downlight includes housing or retrofit kit + LED Module.

PR8 SeleCCTable™ Series

DOWNLIGHT

- 8-inch LED self-flanged, lensed recessed downlight
- Available in new construction and retrofit
- 3 Color Selectable in 30/35/4000K; 80 CRI
- Universal input 120V-277V with 0-10V 1% dimming
- Medium and wide interchangeable lens options



Rapid Response



Catalog Number	Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
PR820D010	8" Housing	Raw Finish	18W-32W CFL	3000K-4000K	120-277V	2,000	22	080083771769	2289673
PR8M12MDMW	8" LED Module	Matte Finish	18W-32W CFL	3000K-4000K	120-277V	1,000-2,000	N/A	080083772926	2289581
PR8R20D010	8" Retrofit Kit	Raw Finish	18W-32W CFL	3000K-4000K	120-277V	2,000	22	080083772179	2289681

Complete downlight includes housing or retrofit kit + LED Module.

HALO COMMERCIAL DOWNLIGHTING

HC4 Downlight Series

DOWNLIGHT

- 4-inch LED self-flanged, deep regressed lens downlight
- New construction boat-shaped frame converts to remodeler
- Lumens: 1,000, 1,500, 2,000
- Color temperature: 3500K; 80 CRI
- Medium distribution reflector



Catalog Number	Description	Finish	Replaces Up To	CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
HC410D010	4" Housing	Raw Finish	75W INC, 18-26W CFL	N/A	120-227V	1,000	10.1W at 120V, 10.9W at 277V	080083860586	2331377
HC415D010	4" Housing	Raw Finish	100W INC, 26-32W CFL	N/A	120-277V	1,500	14.2W at 120V, 14.9W at 277V	080083860609	2340373
HC420D010	4" Housing	Raw Finish	150W INC, 32W-42W CFL	N/A	120-227V	2,000	21.1W at 120V, 21.4W at 277 V	080083860623	2331586
HM40525835	4" LED Module	White	N/A	3500K	120-227V	500-2,500	N/A	080083213948	N/A
41MDH	4" Reflector	Semi-Specular Clear (Haze)	N/A	N/A	N/A	N/A	N/A	080083850181	N/A

Complete downlight includes: Housing + LED Module + Reflector.

HC6 Downlight Series

DOWNLIGHT

- 6-inch LED self-flanged, deep regressed lens downlight
- New construction boat-shaped frame converts to remodeler
- Lumens: 1,000, 1,500, 2,000
- Color temperature: 3500K; 80 CRI
- Medium distribution reflector



Catalog Number	Description	Finish	Replaces Up To	CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
HC610D010	6" Housing	Raw Finish	75W INC, 18-26W CFL	N/A	120-227V	1,000	10.W at 120V, 10.9W at 277V	080083883646	2340539
HC615D010	6" Housing	Raw Finish	100W INC, 26-32W CFL	N/A	120-227V	1,500	14.2W at 120V, 14.9W at 277V	080083883660	2340646
HC620D010	6" Housing	Raw Finish	150W INC, 32W-42W CFL	N/A	120-227V	2,000	21.1W at 120V, 21.4W at 277V	080083883684	2340647
HM60525835	6" LED Module	White	N/A	3500K	120-227V	500-2,500	N/A	080083214662	N/A
61MDH	6" Reflector	Semi-Specular Clear (Haze)	N/A	N/A	N/A	N/A	N/A	080083850983	N/A

Complete downlight includes: Housing + LED Module + Reflector.

HALO COMMERCIAL DOWNLIGHTING

HC8 Downlight Series

DOWNLIGHT

- 8-inch LED self-flanged, deep regressed lens downlight
- New construction boat-shaped frame converts to remodeler
- Lumens: 1,000, 1,500, 2,000
- Color temperature: 3500K; 80 CRI
- Medium distribution reflector



Catalog Number	Description	Finish	Replaces Up To	CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
HC810D010	8" Housing	Raw Finish	75W INC, 18-26W CFL	N/A	120-227V	1,000	10.W at 120V, 10.9W at 277V	080083216062	2470933
HC815D010	8" Housing	Raw Finish	100W INC, 26-32W CFL	N/A	120-227V	1,500	14.2W at 120V, 14.9W at 277V	080083907861	2351453
HC820D010	8" Housing	Raw Finish	150W INC, 32W-42W CFL	N/A	120-227V	2,000	21.1W at 120V, 21.4W at 277V	080083907908	2351457
HM80520835	8" LED Module	White	N/A	3500K	120-227V	500-2,000	N/A	080083216468	2351454
81MDH	8" Reflector	Semi-Specular Clear (Haze)	N/A	N/A	N/A	N/A	N/A	080083909902	N/A

Complete downlight includes: Housing + LED Module + Reflector.





Flat Panels
p. 37-38



Troffers
p. 38-39



Strip Lights
p. 40-41



Wraps
p. 41-42



Wavelinx LITE
p. 43-45

METALUX

COMMERCIAL LED LIGHTING

Metalux Commercial features a wide selection of affordable yet aesthetically pleasing fixtures with an expanded offering of selectable color temperatures and lumen options.

METALUX FLAT PANELS

CGT | CGTS Series

FLAT PANEL

- Affordable contractor LED panel with fixed or selectable configurations
- Fits in shallow plenums with room to spare; Thin 2 1/8 -inch height
- 3 Color Field-Selectable in 35/40/5000K and dedicated in 3500K, 4000K, 5000K
- 3 Field-Selectable lumens: Low, Medium or High settings
- Ideal for office spaces, education, healthcare and retail merchandising



Selectable CCT & Lumens

Catalog Number	Description	Replaces Up To	Selectable CCT	Voltage	Selectable Lumens	Watts	UPC	DLC Product ID
14CGTS-L3C3	1'x4' Recessed Panel	2-T8	3500K-5000K	120-277V	3,200-5,100	21/31/36	080083282517	S-3EJHF2
22CGTS-L3C3	2'x2' Recessed Panel	3-T8 17W, 2-U6T8	3500K-5000K	120-277V	2,500-4,900	21/29/39	080083194728	PL74TQBZR6SL
24CGTS-L3C3	2'x4' Recessed Panel	4-T8 32W	3500K-5000K	120-277V	3,700-6,800	27/39/51	080083194704	PL0ULJMKXBCH

Dedicated CCT & Lumens

Catalog Number	Description	Replaces Up To	CCT	Voltage	Lumens	Watts	UPC	DLC Product ID
22CGT3535C	2'x2' Recessed Panel	3-T8	3500K	120-277V	3,449	32	080083880003	P6WE1HNZ
22CGT3540C	2'x2' Recessed Panel	3-T8	4000K	120-277V	3,582	32	080083880027	P0YGNM7S
24CGT4535C	2'x4' Recessed Panel	2-T8, 3-T8	3500K	120-277V	4,268	38	080083880089	P28JP113
24CGT4540C	2'x4' Recessed Panel	2-T8, 3-T8	4000K	120-277V	4,432	38	080083880102	PLTEVMIJ
24CGT4550C	2'x4' Recessed Panel	2-T8, 3-T8	5000K	120-277V	4,432	38	080083880126	P8BJJLKN
24CGT5535C	2'x4' Recessed Panel	3-T8, 4-T8	3500K	120-277V	5,139	47	080083880164	PGQBATOL
24CGT5540C	2'x4' Recessed Panel	2-T8, 4-T8	4000K	120-277V	5,337	47	080083880188	P5F04P82

FP | FPS Series

FLAT PANEL

- Ultra-thin LED flat panel; Less than 2-inches height for shallow plenums
- 3 Color Field-Selectable in 30/35/4000K and dedicated in 3500K, 4000K
- Selectable switch to set color temperature, lumens and watts desired for task
- Refined visual optics, superior acrylic light guide; uniform corner to corner illumination
- Ideal for office spaces, schools, healthcare facilities and retail merchandising areas



Selectable CCT & Lumens

Catalog Number	Description	Replaces Up To	Selectable CCT	Voltage	Selectable Lumens	Watts	UPC	DLC Product ID
14FPSL1SCT3	1'x4' Recessed Panel	2-T8	3000K-4000K	120-277V	2,000-4,100	18/27/36	080083889440	PYJV3ZJZ
22FPSL2SCT3	2'x2' Recessed Panel	3-T8	3000K-4000K	120-277V	1,700-3,500	15/22/31	080083889402	PB32RP9H
24FPSL2SCT3	2'x4' Recessed Panel	2-T8, 3-T8	3000K-4000K	120-277V	3,100-6,300	27/40/56	080083889365h	PZFJCMXS

Dedicated CCT & Lumens

Catalog Number	Description	Replaces Up To	CCT	Voltage	Lumens	Watts	UPC	DLC Product ID
22FP3235C	2'x2' Recessed Panel	3-T8	3500K	120-277V	3,307	29	080083833528	PQC9IUIIC
22FP3240C	2'x2' Recessed Panel	3-T8	4000K	120-277V	3,560	30	080083833542	PUOIG6S2
22FP4235C	2'x2' Recessed Panel	2-U6T8	3500K	120-277V	4,641	39	080083833580	P8HIK308
22FP4240C	2'x2' Recessed Panel	3-U6T8	4000K	120-277V	4,567	39	080083833603	PELH4PNQ
24FP4735C	2'x4' Recessed Panel	2-T8, 3-T8	3500K	120-277V	4,990	40	080083833641	PRZ2RGDY
24FP4740C	2'x4' Recessed Panel	2-T8, 3-T8	4000K	120-277V	4,858	40	080083833665	PGY6ID6B
24FP6440C	2'x4' Recessed Panel	3-T8, 4-T8	4000K	120-277V	6,611	59	080083833726	PIBWK9P9

METALUX FLAT PANELS | TROFFERS

RBG Series

FLAT PANEL

- Architectural elegant 6-inch grid, 4-inch aperture fixture
- Recessed, surface or suspension mounting
- 3 Color Field-Selectable in 30/35/4000K; 80 CRI
- Lumen selectable: 500, 750 or 1,000 lumens per foot



Catalog Number	Description	Replaces Up To	Selectable CCT	Voltage	Selectable Lumens	Watts	UPC
2RBG6-SL1-L8SCT3	2' Length	2- F17T8, 2-F14T5	3000K-4000K	120-277V	500/750/1,000*	11/16/19	080083865826
4RBG6-SL1-L8SCT3	4' Length	2-F32T8, 1-F54T5HO, 2-F28T5	3000K-4000K	120-277V	500/750/1,000*	18/28/36	080083866465
8RBG6-SL1-L8SCT3	8' Length	2-F60T8, 2-F75T12	3000K-4000K	120-277V	500/750/1,000*	42/61/75	080083866502

*Lumens per ft.

Cruze ST Recessed | CZS Series

TROFFER

- Architectural center basket lens troffer with aesthetic appeal
- Latch-less design provides clean architectural look; Ribbed, frosted acrylic lens
- 3 Color Field-Selectable in 30/35/4000K and dedicated in 3500K, 4000K
- Ideal choice for commercial, institutional and healthcare facilities



Rapid Response

Selectable CCT & Lumens

Catalog Number	Description	Replaces Up To	Selectable CCT	Voltage	Selectable Lumens	Watts	UPC	DLC Product ID
14CZSCT3-UNV	1'x4', Troffer	2-T8	3000K-4000K	120-277V	3,000-4,400	20-30	080083268443	S-5LPE0V
22CZSCT3-UNV	2'x2', Troffer	2-T5, 2-T8	3000K-4000K	120-277V	2,700-4,075	21-31	080083268467	S-QDP2J8
24CZSCT3-UNV	2'x4', Troffer	2-T8, 3-T8	3000K-4000K	120-277V	3,500-6,500	24-47	080083268481	S-MWOTCN

Dedicated CCT & Lumens

Catalog Number	Description	Replaces Up To	CCT	Voltage	Lumens	Watts	UPC	DLC Product ID
22CZ2-32-UNV-L835-CD1-U	2'x2', Troffer	2-T5, 2-T8	3500K	120-277V	3,280	26	080083881185	PL057CFW
22CZ2-32-UNV-L840-CD1-U	2'x2', Troffer	2-T5, 2-T8	4000K	120-277V	3,280	26	080083881208	PO30DW27
22CZ2-34HE-UNV-L835-CD1-U	2'x2', Troffer	3-T8, 4-T8, 2-T5HO	3500K	120-277V	3,386	26	080083881222	P3AJU020
22CZ2-34HE-UNV-L840-CD1-U	2'x2', Troffer	3-T8, 4-T8, 2-T5HO	4000K	120-277V	3,386	26	080083881260	PMRQB66T
22CZ2-39-UNV-L835-CD1-U	2'x2', Troffer	3-T8, 4-T8, 2-T5HO	3500K	120-277V	3,943	34	080083881284	P0AXJUK1
22CZ2-39-UNV-L840-CD1-U	2'x2', Troffer	3-T8, 4-T8, 2-T5HO	4000K	120-277V	3,943	34	080083881307	PU7UA6BJ
24CZ2-40-UNV-L835-CD1-U	2'x4', Troffer	2-T8, 3-T8	3500K	120-277V	4,196	36	080083881505	PUDYNMME
24CZ2-40-UNV-L840-CD1-U	2'x4', Troffer	2-T8, 3-T8h	4000K	120-277V	4,196	36	080083881529	PHYYSZSG
24CZ2-50-UNV-L835-CD1-U	2'x4', Troffer	2-T8, 2-T5	3500K	120-277V	5,015	48	080083881628	POK3FN8Z
24CZ2-50-UNV-L840-CD1-U	2'x4', Troffer	2-T8, 2-T5	4000K	120-277V	5,015	48	080083881642	PI0YCHQ9

Note: DLC Premium items are noted in bold.

METALUX TROFFERS

Achieva™ Recessed TROFFER

- Ultra slim 1.5" center basket design fits into the shallowest of plenums
- 3 Color Field-Selectable in 30/35/4000K in 80+ CRI
- 3 Selectable lumens in standard or HO options up to 8,150
- Ideal choice for commercial, institutional and healthcare facilities



Catalog Number	Description	Replaces Up To	Selectable CCT	Voltage	Selectable Lumens	Watts	UPC	DLC Product ID
14ARS-L3C3-UNV	1'x4', Troffer	2-T8	3500K-5000K	120-277V	2,800-4,600	20/26/33	080083282241	S-N7LRJL
22ARS-L3C3-UNV	2'x2', Troffer	2-T8, 2-T5	3500K-5000K	120-277V	2,750-4,300	20/26/33	080083282128	S-NOX1OI
22ARS-L3C3-HO-UNV	2'x2', Troffer, High Output	3-T5, 3-T8	3500K-5000K	120-277V	5,000-6,350	37/41/45	080083282203	S-Q6A8TB
24ARS-L3C3-UNV	2'x4', Troffer	2-T8, 3-T8	3500K-5000K	120-277V	3,400-6,250	24/33/46	080083282005	S-EA9S16
24ARS-L3C3-HO-UNV	2'x4', Troffer, High Output	3-T8, 2-T5HO	3500K-5000K	120-277V	6,300-8,150	46/52/58	080083282081	S-SHLC4F
22ARS-L3C3-UNV-MP4	2'x2', Troffer (4-Pack)	2-T5, 2-T8	3500K-5000K	120-277V	2,750-4,300	20/26/33	080083282388	S-NOX1OI
24ARS-L3C3-UNV-MP2	2'x4', Troffer (2-Pack)	2-T8, 3-T8	3500K-5000K	120-277V	3,400-6,250	24/33/46	080083282364	S-EA9S16

Note: DLC Premium items are noted in bold.

SkyRidge Series TROFFER

- Recessed LED specification series with glare-reducing performance
- Affordable, aesthetically pleasing alternative to fluorescent fixtures
- Advanced optical control with optimal illumination
- Ideal choice for commercial office spaces



Catalog Number	Description	Replaces Up To	CCT	Voltage	Lumens	Watts	UPC	DLC Product ID
22SR-LD2-29-C-UNV-L835-CD1-U	2'x2', Recessed Troffer	2-T5, 2-T8	3500K	120-277V	3,095	23	080083752584	PL2K2CYL
22SR-LD2-29-C-UNV-L840-CD1-U	2'x2', Recessed Troffer	2-T5, 2-T8	4000K	120-277V	3,157	23	080083752577	PZ7YMKGH
24SR-LD2-48-C-UNV-L835-CD1-U	2'x4', Recessed Troffer	2-T8, 2-T5	3500K	120-277V	4,805	38	080083752492	P38G9R35
24SR-LD2-48-C-UNV-L840-CD1-U	2'x4', Recessed Troffer	2-T8, 2-T5	4000K	120-277V	4,901	38	080083752485	PDLK7ZMQ

Note: DLC Premium items are noted in bold.

CooperKit Retrofit Kit Series TROFFER

- Ideal for upgrading existing recessed fluorescent lighting
- Engineered for quick installation for increased labor savings
- Increased LED efficiency for energy savings and local utility rebates
- Reduced maintenance costs due to the extended lifetime of LEDs



Catalog Number	Description	Replaces Up To	CCT	Voltage	Lumens	Watts	UPC	DLC Product ID
22CBRK-31-UNV-L840-CD1-U	2'x2' Center Basket Retrofit Kit	2-T5, 2-T8	4000K	120-277V	3,168	21	080083195909	P6PT30P6
22CBRK-31-UNV-L835-CD1-U	2'x2' Center Basket Retrofit Kit	2-T5, 2-T8	3500K	120-277V	3,039	21	080083195886	PVNO5QZK
24CBRK-42-UNV-L840-CD1-U	2'x4' Center Basket Retrofit Kit	2-T8, 3-T8	4000K	120-277V	4,200	28	080083196203	P1DQUGFJ
24CBRK-42-UNV-L835-CD1-U	2'x4' Center Basket Retrofit Kit	2-T8, 3-T8	3500K	120-277V	4,066	28	080083196180	PIJLJK3T

Note: DLC Premium items are noted in bold.

METALUX STRIP LIGHTS

SLSTP Series STRIP LIGHT

- LED strip light with decorative end caps and toolless lens removal
- Suitable for either single or continuous row application
- 3 Color Field-Selectable in 35/40/5000K and dedicated in 4000K
- Field-Selectable lumens 2,400 - 11,200 or dedicated up to 9300
- Impact resistant polycarbonate lens reduces maintenance



Selectable CCT & Lumens

Catalog Number	Description	Replaces Up To	Selectable CCT	Voltage	Selectable Lumens	Watts	UPC	DLC Product ID
4SLSTPSLC-UNV	4' Single Lens	2-T8 32W, 1-T5HO 54W	3500K-5000K	120/277V	2,400-6,000	18-46	080083174416	S-OICHU8
8SLSTPSLC-UNV	8' Single Lens	4-T8 32W, 2-T12 75W	3500K-5000K	120/277V	4,300-11,200	33-85	080083174423	S-7SKGJW

Dedicated CCT & Lumens

Catalog Number	Description	Replaces Up To	CCT	Voltage	Lumens	Watts	UPC	DLC Product ID
4SLSTP4040DD-UNV	4' Single Lens	2-T8 32W, 1-T5HO 54W	4000K	120/277V	4,927	41	080083705825	PXZQGN9C
8SLSTP8040DD-UNV	8' Single Lens	4-T8 32W, 2-T12 75W	4000K	120/277V	9,304	79	080083814787	POK8WFD1

Sensor Kits

Catalog Number	Description	PIR Sensor	UPC
SLSTP MS00 KIT	SLSTP Field Installable Sensor KIT	100% / 50% / OFF	080083254200
SLSTP MS25 KIT	SLSTP Field Installable Sensor KIT	100% / 50% / Low (~30%)	080083254224

SNX Series STRIP LIGHT

- Contemporary single frosted radial lens LED strip light
- Replaces two or four lamp fluorescents up to 150W
- 3 Color Field-Selectable in 35/40/5000K and dedicated in 4000K
- 3 Field-Selectable lumens: Low, Medium or High settings
- Single or continuous row via surface or suspended mount



Selectable CCT & Lumens

Catalog Number	Description	Replaces Up To	Selectable CCT	Voltage	Selectable Lumens	Watts	UPC	DLC Product ID
4SNX-SL3-LW-UNV-CC83-CD1-U	4' Single Lens	2-T8 32W, 1-T5HO 54W	3500K-5000K	120-277V	2,000-6,100	17-51	080083265107	S-Z5CGBY
8TSNX-SL3-LW-UNV-CC83-CD2-U	8' Single Lens	4-T8 32W, 2-T12 75W	3500K-5000K	120-277V	4,100-12,000	34-101	080083265114	S-V503E2

Dedicated CCT & Lumens

Catalog Number	Description	Replaces Up To	CCT	Voltage	Lumens	Watts	UPC	DLC Product ID
4SNX-45SL-LW-UNV-L840-CD1-U	4' Single Lens	2-T8 32W	4000K	120-277V	4,300	30	080083277605	S-CSWH9R
8TSNX-82SL-LW-UNV-L840-CD1-U	8' Single Lens	4-T8 32W	4000K	120-277V	7,700	53	080083277612	S-825EGL

ST Series STRIP LIGHT

- Full-length LED strip light ideal for replacing fluorescent strips
- Superior performance with lumens up to 9,200 and 115 lumens per watt
- 3 Color Field-Selectable in 35/40/5000K
- Continuous row mount aligner included to add-on length as needed
- Low voltage 0-10V dimming to 10%



Dimming and Selectable CCT

Catalog Number	Description	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	UPC	DLC Product ID
2ST2L20SC3	2' Dual Lens, Dimming	2-T8 17W	3500K-5000K	120-277V	2,258	19	080083241569	S-UQ028D
4ST2L40SC3	4' Dual Lens, Dimming	2-T8 32W, 1-T5HO 54W	3500K-5000K	120-277V	4,653	40	080083241583	S-TSP41D
8ST2L80SC3	8' Dual Lens, Dimming	4-T8 32W, 2-T12 75W	3500K-5000K	120-277V	9,060	78	080083242207	S-5J2ZA0

Achieva™ Surface WRAP

- Ideal for replacing up to four lamp fluorescent and low-bay linear fluorescents
- 3 Color Field-Selectable in 35/40/5000K, Field-Selectable lumens: 2,250 - 12,500
- Designed for single or continuous row mount
- Suitable for ceiling, wall, or suspension mounting



Catalog Number	Description	Replaces Up To	Selectable CCT	Voltage	Selectable Lumens	Watts	UPC	DLC Product ID
2AWS-L3C3-UNV	2' Narrow Modern Wrap, Dimming	2-T8 17W	3500K-5000K	120-277V	2,250-3,084	18/21/25	080083281244	Pending
4AWS-L3C3-UNV	4' Narrow Modern Wrap, Dimming	2-T8 32W	3500K-5000K	120-277V	4,095-5,916	31/38/46	080083281602	Pending
8AWS-L3C3-UNV	8' Narrow Modern Wrap, Dimming	2-T8 96W, 4-T8 32W	3500K-5000K	120-277V	7,845-12,019	54/71/83	080083281800	Pending
2AWWS-L3C3-UNV	2' Wide Modern Wrap, Dimming	3-T8 17W	3500K-5000K	120-277V	2,313-3,170	18/21/25	080083281541	Pending
4AWWS-L3C3-UNV	4' Wide Modern Wrap, Dimming	3-T8 32W	3500K-5000K	120-277V	4,254-6,013	31/38/47	080083281701	Pending
8AWWS-L3C3-UNV	8' Wide Modern Wrap, Dimming	3-T8 96W, 6-T8 32W	3500K-5000K	120-277V	8,296-12,554	57/74/85	080083281909	Pending

NWS Series

WRAP

- Ideal for replacing two or three lamp fluorescents up to 96W
- 3 Color Field-Selectable in 35/40/5000K
- Field-Selectable lumens: 2,000 - 5,272
- Surface (wall or ceiling) mount via junction box or direct to surface, UNV 0-10V dimming to 10%



Catalog Number	Description	Replaces Up To	Selectable CCT	Voltage	Selectable Lumens	Watts	UPC	DLC Product ID
2NWS3C3-UNV	2' Wrap, Dimming	2-T8 17W	3500K-5000K	120-277V	2,009-2,679	15/18/21	080083257485	S-PKU0E2
4NWS3C3-UNV	4' Wrap, Dimming	3-T8 32W	3500K-5000K	120-277V	3,300-4,800	28/32/39	080083257522	S-YJTA0N
4NWS3C3MS-UNV	4' Wrap, Dimming, Sensor *	3-T8 32W	3500K-5000K	120-277V	3,675-5,016	28/32/38	080083257607	S-2V0NL5

* Includes integrated microwave motion sensor (MS) option.

WP Series

WRAP

- Compact LED wrap light delivers value and energy savings
- Perfect retrofit solution for replacing single or 2-lamp fluorescent wraparounds
- Low-profile, highly versatile design; Post-painted die-formed channel
- Prismatic lens ensures even, glare-free light distribution



Catalog Number	Description	Replaces Up To	CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
4WP3040R	4' Utility Wrap	2-T8 32W	4000K	120-277V	4010	34	080083847167	2326235

WNLED Series

WRAP

- Utility commercial LED linear wrap
- Single or continuous row applications
- Frosted lens offers best-in-class uniform illumination
- Minimizes maintenance common with traditional fluorescents



Catalog Number	Description	Replaces Up To	CCT	Voltage	Lumens	Watts	UPC	DLC Product ID
4WNLED-LD4-40SL-F-UNV-L840-CD1-U	4' Linear Wrap	2-T12, 2-T8 32W	4000K	120/277V	4,006	30	080083756889	PK3W95DW



Simple. Secure. Scalable.

WaveLinx LITE is your out-of-the-box functionality app based smart digital lighting system that helps you save energy and manage your site lighting designed for applications that require:

- Standalone/Grouped Occupancy Sensing
- Manual/Personal Dimming Control
- Daylighting

WaveLinx LITE product categories:



Sensors



Control Stations




Control Modules




Software & Apps

A secure mobile application provides the ability to customize installations for office, education, warehouse, and parking garage applications.



SCAN for more WaveLinx LITE information

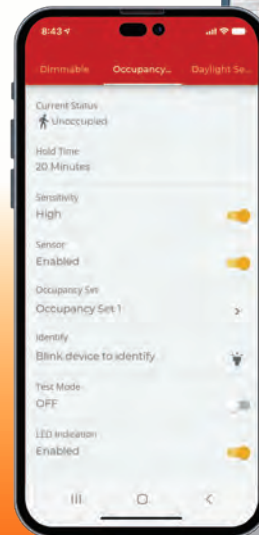

WaveLinx LITE app for standalone spaces with wireless devices

Communicates with the LITE devices directly using the mobile device Bluetooth radio.



Cruze ST Recessed with WaveLinx LITE TROFFER

- Wireless integrated sensors provide standalone operation that meets code
- Simple set up of the wireless integrated sensors via the mobile app
- Latch-less design provides clean architectural look; Ribbed, frosted acrylic lens
- High-performance LED system with advanced light distribution
- Ideal choice for commercial, institutional and healthcare facilities



Catalog Number	Description	Replaces Up To	CCT	Voltage	Lumens	Watts	UPC	DLC Product ID
22CZ2-34HE-UNV-L835-CD1-WAB-U	2'x2', Troffer	3-T8, 4-T8, 2-T5HO	3500K	120-277V	3,426	24	080083199402	P3AJU020
22CZ2-44-UNV-L840-CD1-WAB-U	2'x2', Troffer	3-T8, 4-T8, 2-T5HO	4000K	120-277V	4,470	33	080083282937	PKWC1G2R
24CZ2-40HE-UNV-L835-CD1-WAB-U	2'x4', Troffer	3-T8, 4-T8, 3-T5HO	3500K	120-277V	4,150	31	080083199419	PPC283QT
24CZ2-45-UNV-L840-CD1-WAB-U	2'x4', Troffer	3-T8, 4-T8, 3-T5HO	4000K	120-277V	4,600	35	080083282944	PMW8667C

Note: DLC Premium items are noted in bold.

Achieva™ Recessed with WaveLinx LITE* TROFFER

- Wireless integrated sensors provide standalone operation that meets code
- Ultra slim 1.5" center basket design fits into the shallowest of plenums
- 3 Color Field-Selectable in 30/35/4000K in 80+ CRI, 3 Selectable lumens in standard or HO options up to 8,000
- Ideal choice for commercial, institutional and healthcare facilities



Catalog Number	Description	Replaces Up To	Selectable CCT	Voltage	Selectable Lumens	Watts	UPC	DLC Product ID
14ARS-L3C3-UNV-WAB	1'x4', Troffer	2-T8	3500K-5000K	120-277V	2,800-4,600	20-34	N/A	S-N7IRJL
22ARS-L3C3-UNV-WAB	2'x2', Troffer	2-T8, 2-T5	3500K-5000K	120-277V	2,750-4,300	20-33	N/A	S-N0X10I
24ARS-L3C3-UNV-WAB	2'x4', Troffer	2-T8, 3-T8	3500K-5000K	120-277V	3,400-6,250	24-47	N/A	S-EA9S16

*The Metalux Achieva with WaveLinx Lite has extend lead times. Please check with your Sales representative.
Note: DLC Premium items are noted in bold.

RSP WaveLinx LITE SWITCHPACK

- 20A rated relay
- 0-10v dimming control
- Plenum-rated design with easy junction box mounting
- Universal voltage input (120, 277 and 347 VAC)
- Suitable for plug load control



Catalog Number	Description	Voltage	UPC
RSP-L-010-347	WaveLinx LITE Wireless, Dimming	120/347V	080083288229

WTK Wireless Tilemount WaveLinx LITE

SENSOR KIT

- Enable 0-10V luminaires to be controlled by the WaveLinx LITE system
- 120-277VAC with 3 amp relay and 0-10V continuous dimming
- Mounting heights of 8 to 15ft (2.4 to 4.5m)
- Provides PIR and photocell capabilities
- Installs into 1/2-3/4" (12-19mm) ceilings or octagonal junction boxes



Catalog Number	Description	Finish	Voltage	UPC	DLC Product ID
WTK	WaveLinx LITE Tilemount Sensor Kit	White	120-277V	080083293261	Pending

Wallstation WaveLinx LITE

WALLSTATION

- Multi-scene selection, and zone programmable
- Suitable for standard single or multi-gang NEMA wall box
- Line voltage (120-277VAC) and battery powered options
- Configurable through software - no physical adjustments




Line Voltage Wallstation

Catalog Number	Description	Finish	Voltage	UPC	DLC Product ID
WWL3-W	Wallstation, 3 Button	White	120-277V	080083283170	Pending
WWL3-RL-W	Wallstation, 3 Button Raise / Lower	White	120-277V	080083282449	Pending
WWL5-RL-W	Wallstation, 5 Button Raise / Lower	White	120-277V	080083283149	Pending

Wireless Battery Powered Wallstation

Catalog Number	Description	Finish	Voltage	UPC	DLC Product ID
WWBL3-W	Wallstation, 3 Button,	White	N/A	080083256600	Pending
WWBL3-RL-W	Wallstation, 3 Button Raise / Lower	White	N/A	080083256198	Pending
WWBL5-RL-W	Wallstation, 5 Button Raise / Lower	White	N/A	080083256181	Pending

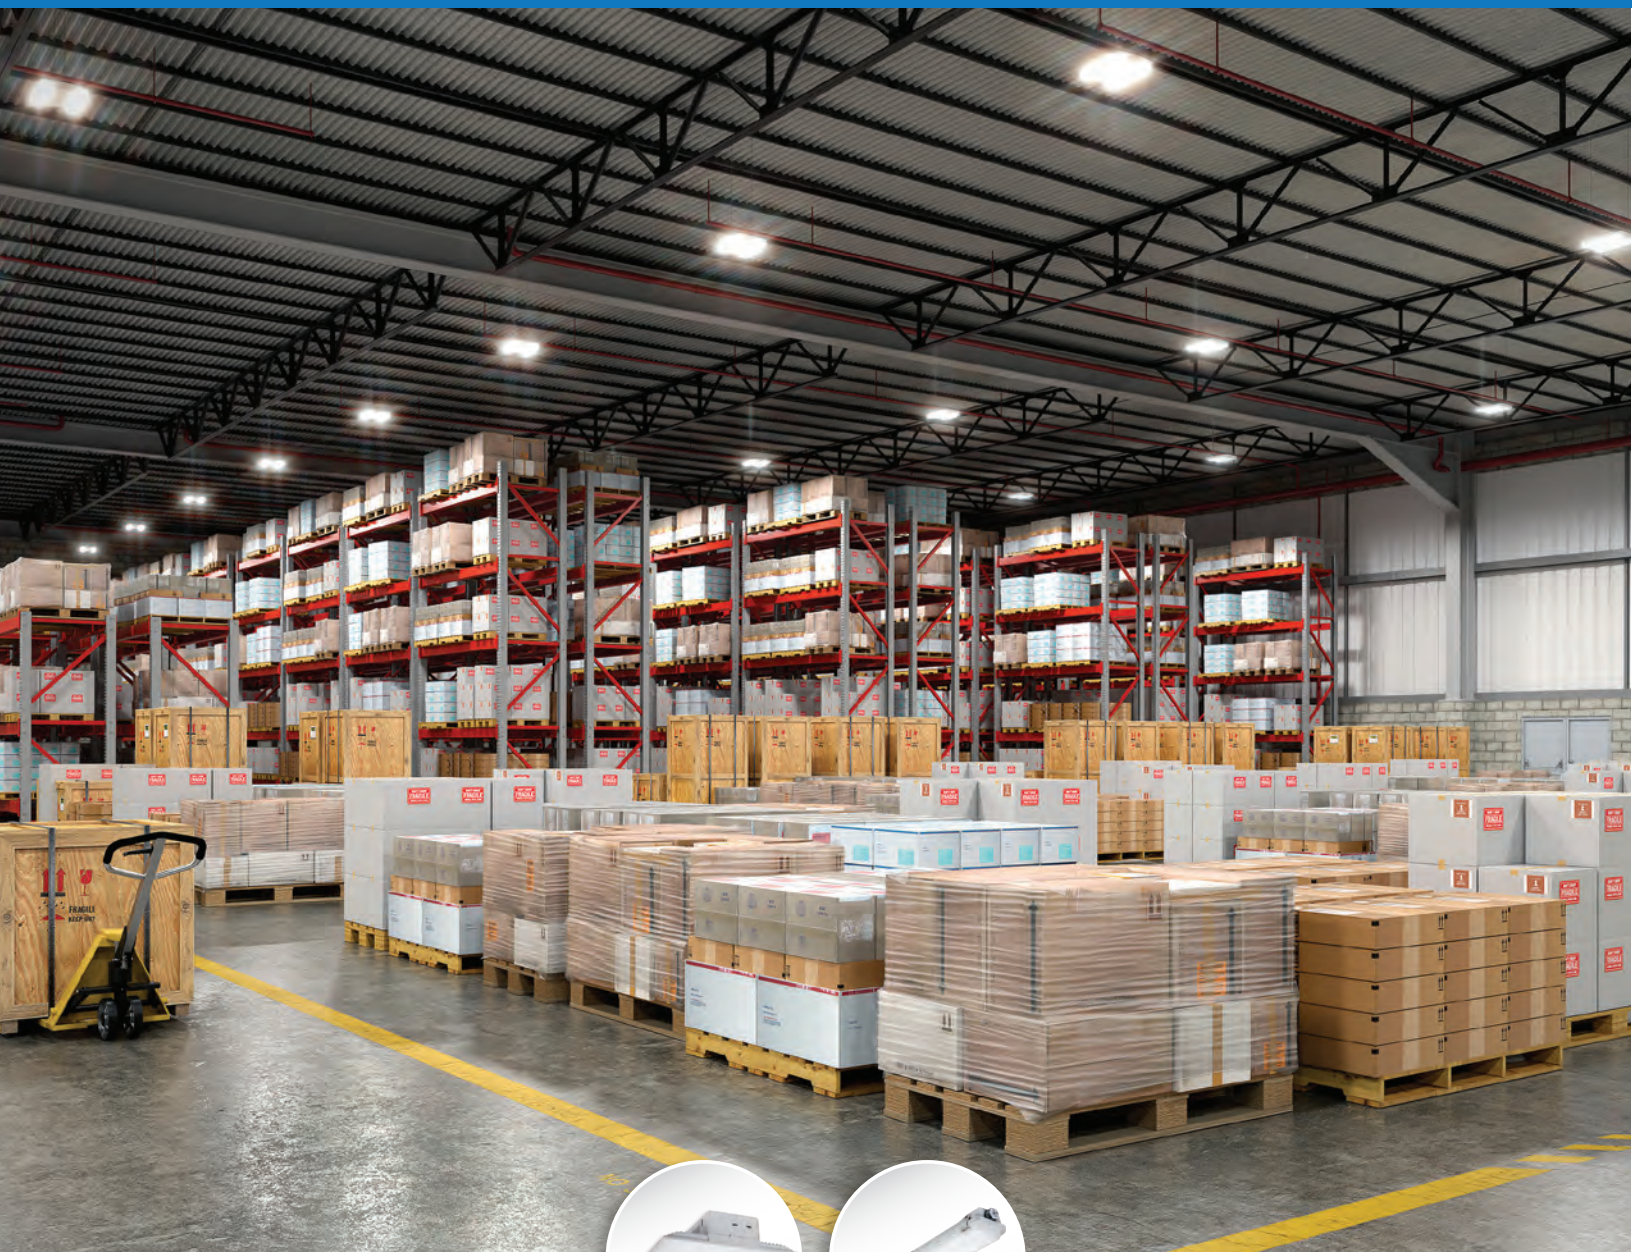

High Bays
p. 47-48



Vaportites
p. 48-49

METALUX

INDUSTRIAL LIGHTING

Metalux Industrial offers a selection of economical and energy-efficient high-bay and vapo-tite lighting solutions designed for a wide variety of applications.

METALUX HIGH BAYS

VHB Series HIGH BAY

- Designed for a wide variety of applications and mounting heights
- Precision designed optics; High impact polycarbonate optical LED lens
- Compact, lightweight design for ease of installation
- Solution for spaces utilizing traditional linear fluorescent and HID high bay
- Ideal for industrial, commercial, manufacturing and gymnasium applications



Rapid Response



Selectable Lumens

Catalog Number	Description	Replaces Up To	CCT	Voltage	Selectable Lumens	Watts	UPC	DLC Product ID
VHB-1215-W-UNV-L840-CD-U	Wide Distr.	4-T8, 3-T5HO, 175W MH	4000K	120/277V	12,000-15,000	110	080083192304	PJHJOBPH
VHB-1215-W-UNV-L850-CD-U	Wide Distr.	4-T8, 3-T5HO, 175W MH	5000K	120/277V	12,000-15,000	110	080083192311	PQX68N7B
VHB-1824-W-UNV-L840-CD-U	Wide Distr.	4-T5HO, 6-T8 320W MH, 6-T5HO, 8-T8, 400W MH	4000K	120/277V	18,000-24,000	158	080083192328	PKWWO6XP
VHB-1824-W-UNV-L850-CD-U	Wide Distr.	4-T5HO, 6-T8 320W MH, 6-T5HO, 8-T8, 400W MH	5000K	120/277V	18,000-24,000	158	080083192335	PMKN6560

Dedicated CCT & Lumens

Catalog Number	Description	Replaces Up To	CCT	Voltage	Lumens	Watts	UPC	DLC Product ID
VHB-18-W-UNV-L840-CD-U	Wide Distr.	4-T5HO, 6-T8 320W MH	5000K	120/277V	18,647	134	080083785919	P75UEXLK
VHB-18-W-UNV-L850-CD-U	Wide Distr.	4-T5HO, 6-T8 320W MH	4000K	120/277V	19,160	134	080083785902	PIIJDELY
VHB-24-W-UNV-L840-CD-U	Wide Distr.	6-T5HO, 8-T8, 400W MH	5000K	120/277V	23,057	174	080083815708	PJ92YFP9
VHB-24-W-UNV-L850-CD-U	Wide Distr.	6-T5HO, 8-T8, 400W MH	4000K	120/277V	23,692	174	080083818365	PH575GE1

LHBS Series HIGH BAY

- Economical industrial high bay/low bay LED linear luminaire
- CCT (4000/5000K) and lumen select for greater flexibility
- Standard diffused lens provides added protection and glare control
- Energy-efficient, one-for-one replacement of linear fluorescent and HID fixtures
- Perfect for industrial, manufacturing, gymnasium and warehouse applications



Catalog Number	Description	Replaces Up To	Selectable CCT	Voltage	Selectable Lumens	Watts	UPC	DLC Product ID
LHBS-1218-UNV-L84050-U	Lensed HB Select, Medium Distr	4-T8, 3-T5HO, 175W MH	4000K-5000K	120-277V	13,000-18,000	85-124	080083274741	S-J1KSFT
LHBS-1824-UNV-L84050-U	Lensed HB Select, Medium Distr	6-T5HO, 8-T8, 400W MH	4000K-5000K	120-277V	18,800-24,000	119-156	080083275625	S-24YMLJ
LHBS-2436-UNV-L84050-U	Lensed HB Select, Medium Distr	8-T5HO, 10-T8, 750W MH	4000K-5000K	120-277V	24,388-36,000	155-246	080083276141	S-EUK8B9

Note: DLC Premium items are noted in bold.

METALUX HIGH BAYS | VAPORTITES

UHBS Selectable Series

HIGH BAY

- Compact, 13" and 15" round die cast aluminum housing
- Up to 36,000 selectable lumens and 4000K/5000K selectable CCT
- Sensor ready port for quick plug and play install
- 120-347 volt operating range



Catalog Number	Description	Replaces Up To	Selectable CCT	Voltage	Selectable Lumens	Watts	UPC	DLC Product ID
UHBS-1218-MV-L84050-U	Round, Medium Distr., White	320W Halide, 4-T5HO 54W	4000K-5000K	120-347V	12,000-18,000	81-120	080083256471	S-PEIA6S
UHBS-2436-MV-L84050-U	Round, Medium Distr., White	750W Halide, 8-T5HO 54W	4000K-5000K	120-347V	24,000-36,000	145-238	080083256488	S-Z5HGE1
UHBS-1218-MV-L84050-BLK	Round, Medium Distr., Black	320W Halide, 4-T5HO 54W	4000K-5000K	120-347V	12,000-18,000	81-120	080083272341	S-PEIA6S
UHBS-2436-MV-L84050-BLK	Round, Medium Distr., Black	750W Halide, 8-T5HO 54W	4000K-5000K	120-347V	24,000-36,000	145-238	080083272365	S-Z5HGE1

Note: DLC Premium items are noted in bold.

Accessories

Catalog Number	Description	UPC
UHBS-CLR13	UHBS 13" Dia. Clear PC Reflector	080083273300
UHBS-CLR15	UHBS 15" Dia. Clear PC Reflector	080083273317
UHBS-ALR13	UHBS 13" Dia. Aluminum Reflector	080083273324
UHBS-ALR15	UHBS 15" Dia. Aluminum Reflector	080083273331
UHBS-WG13	UHBS 13" Dia. Wire Guard	080083273348
UHBS-WG15	UHBS 15" Dia. Wire Guard	080083273355

PIR Sensor

Catalog Number	Description	UPC
UHBS-SENSOR PK	PIR Sensor, 360 Lens	080083257898

SPHB Selectable Series

HIGH BAY

- 2 Compact, lightweight designs for easy install
- Up to 36,000 selectable lumens and 4000K/5000K selectable CCT
- Sensor Ready port for quick plug and play install
- Great for Industrial, manufacturing, gymnasium, and warehouse



Selectable lumen output and color temperature with an easy to access toggle switch.



Catalog Number	Description	Replaces Up To	Selectable CCT	Voltage	Selectable Lumens	Watts	UPC	DLC Product ID
SPHB-1224SE-M-UNV-L84050-CD-SP1-U	Med. Distr	6-T5HO, 8-T8, 400W MH	4000K-5000K	120-277V	12,000-24,000	82/123/166	080083289264	Pending
SPHB-2436SE-M-UNV-L84050-CD-SP1-U	Med. Distr	8-T5HO, 10-T8, 750W MH	4000K-5000K	120-277V	24,000-36,000	162/209/251	080083289288	Pending

APVT | APVT-S Series

VAPORTITE

- Durable polycarbonate housing with integral metal gear tray
- 4ft and 8ft sizes with CCT and lumen select capability
- UL Wet location, IP65 and Operating temp -20C to 40C
- Stainless steel latches, single conduit hub, and mounting included



Catalog Number	Description	Replaces Up To	Selectable CCT	Voltage	Selectable Lumens	Watts	UPC	DLC Product ID
4APVTLD-SL3C3	4' Selectable Output	3-T8 32W, 2-T5HO 54W	3500K-5000K	120-277V	3,000-6,000	21-46	080083264216	S-M39BJL
8APVTLD-SL3C3	8' Selectable Output	4-T8 32W, 3-T5HO 54W	3500K-5000K	120-277V	8,500-12,000	59-94	080083266333	S-3EH2VC

METALUX VAPORTITES

VT Series VAPORTITE

- Sealed and gasketed, reinforced fiberglass housing with a high impact lens
- Internal fasteners and tethers provide maximum protection and rigidity
- Optical performance for interior and exterior applications; IP65 certified; NSF Listed
- Ideal for parking garages, manufacturing and complex environments



Catalog Number	Description	Replaces Up To	CCT	Voltage	Lumens	Watts	UPC	DLC Product ID
4VT3-LD5-4-G-UNV-L840-CD1-U	4' Fixed Output	2-T8, 1-T5HO	4000K	120/277V	4,428	32	080083851867	PC2056W8
4VT3-LD5-6-G-UNV-L840-CD1-U	4' Fixed Output	3-T8, 1-T5HO	4000K	120/277V	6,490	51	080083851447	P8U3H2QZ

Good Better Best



		LHBS	VHB	SPHB	UHBS
APPLICABILITY ¹	Big Box Retail	★	★	★★	★★
	Sports / Recreation	★★	★★	★★	★★
	Warehouses	★★★	★★★	★★★	★★
	Manufacturing	★★	★★	★★★	★★
	Cold Storage	★	★★★	★★★	★
	Complex Environments		★	★	★★

		LHBS	VHB	SPHB	UHBS
FEATURES / PERFORMANCE	Lumen Range	12,000 - 36,000	9,000 - 24,000	12,000 - 36,000	12,000-36,000
	Selectable Lumens	12,000-18,000 or 18,000-24,000 or 24,000-36,000	12,000 - 15,000 or 18,000 - 24,000	12,000 - 24,000 or 24,000 - 36,000	12,000-18,000 or 24,000-36,000
	Efficacy (Max)	160 lm/W	147 lm/W	158 lm/W	137 lm/W
	CRI	80	70, 80, 90	80	80
	Distribution	M	N, W	M	M
	Sizes	13" x 2' & 4'	< 2'	12" x 18" or 12" x 36"	13" & 15"
	Housing ²	CRS	CRS / Extruded	CRS	Diecast
	Lensing	Acrylic	Polycarbonate	Polycarbonate	Polycarbonate
	Uplight	None	None	None	None
	Life (@ 60K hrs)	L84	L83	L86	L91
	Ambient Range	-20C to 50C	-40C to 40C	-40C to 45C	-40C to 45C
	Emergency	None	Remote	Optional	None
	Ratings	Damp	Damp	Damp, IP5X	IP65, NSF, Wet Location
DLC	Premium	Standard, Premium	Premium	Standard	

		LHBS	VHB	SPHB	UHBS
INTEGRATED CONTROLS	Basic Occupancy		✓	✓	
	Stand Alone Daylight / Occupancy		✓	✓	✓
	WaveLinx		✓	✓	

Notes: 1. ★★★ = high applicability, ★★ = medium applicability, ★ = low applicability, blank = non-applicable
2. CRS=Cold-rolled Steel, Extruded= Extruded Aluminum, Diecast=Diecast Aluminum.

Compatible Controls

Warehouse facilities must meet requirements of ASHRAE Standard 90.1 2010. The High Bay Fixture Mount Sensor solves this by meeting and exceeding those requirements.



OEF High Bay Fixture Mount Sensor
See page 55



Corelite
p. 51



iO
p. 51

ARCHITECTURAL COMMERCIAL LIGHTING

iO and Corelite delight architects by offering simple designs that create comfort with a perfect balance of beautiful aesthetics, superior performance and ease of installation.

Perceive Recessed Architectural Series

CORELITE

- 3D optical pattern adds dimension and visual interest on a smooth flat surface
- Low-glare solution for increased comfort level
- Extruded aluminum bezel for enhanced durability and clean finished look
- Bottom surface can be wiped down for easy cleaning and maintenance
- Ideal solution for office spaces, schools, and healthcare facilities



Catalog Number	Description	Replaces Up To	CCT	Voltage	Lumens	Watts	UPC
22PT-35-PB1-L835-U	2'x2' Troffer	3-T8, 4-T8, 2-T5HO	3500K	120-277V	3,500	27	080083253906
22PT-35-PB1-L840-U	2'x2' Troffer	3-T8, 4-T8, 2-T5HO	4000K	120-277V	3,500	29	080083253913
24PT-45-PB1-L835-U	2'x4' Troffer	2-T8, 3-T8	3500K	120-277V	4,500	37	080083253920
24PT-45-PB1-L840-U	2'x4' Troffer	2-T8, 3-T8	4000K	120-277V	4,500	37	080083253937

CovSelect Architectural Cove Light

io

- Cove lighting fixture with integral driver for interior applications
- Field-Selectable CCTs: 2700K, 3000K, 3500K, 4000K; 80 CRI
- Field-Selectable lumen output: 350 lumens/ft and 700 lumens/ft
- Up to 200 ft run from a single power drop
- Rated for interior / damp installations
- Simplifies install by eliminating remote drivers and field assembly needed for tape light



No QS prefix needed for stock or Quick Ship orders

Catalog Number	Description	Replaces Up To	Selectable CCT	Voltage	Selectable Lumens	Watts	UPC	Energy Star ID
CS-SL-8SCT-120-ID-UNV-W-SA-STD-4F	4' Linear Fixture	32W T8, 40W T12	2700K-4000K	120-277V	350 lm/ft, 700 lm/ft	21	080083267095	2401210
CS-SL-8SCT-120-ID-UNV-W-SA-STD-1F	1' Linear Fixture	32W T8, 40W T13	2700K-4000K	120-277V	350 lm/ft, 700 lm/ft	6	080083267507	2401209

Power Harness/Control Modules (1 required for each power drop)

Catalog Number	Description	UPC
CS-10V-STD	Standard Power Harness	080083267088

Accessories (optional)

Catalog Number	Description	UPC
CS-JHARN02-006	6" Jumper accessory	080083267071
CS-JHARN02-012	12" Jumper accessory	080083267064
CS-JHARN02-036	36" Jumper accessory	080083267057
CS-JHARN02-144	144" Jumper accessory	080083267040



Switches/Dimmers
p. 53



Sensors
p. 54-55

GREENGATE

CONTROLS

Meet lighting codes, save energy and reduce installation costs for all of your lighting and control needs with Greengate switches, dimmers and sensors.

WBSD 0-10V Decorator Dimmer

WALL SWITCH

- Provides a full-range of linear-slide dimming control of 0-10V compatible light sources
- Allows user to return to previous light level when turning lights ON
- Can be used in single-pole (1 location) and 3-way (multi-location) applications
- Neutral wire is not required for installation of device
- Ideal for light commercial applications; Compatible with decorator style devices and wallplates



Catalog Number	Description	Finish	Voltage	UPC
WBSD-010DEC-C1	0-10V Decorator Dimmer	White, Ivory, Almond	120V/277V	080083735266
WBSD-010DEC-C2	0-10V Decorator Dimmer	White, Ivory, Light Almond	120V/277V	080083735273

WBSD 0-10V Preset Slide Dimmer

WALL SWITCH

- Full-travel slide control; LED ready
- Class 1 or Class 2 wiring capabilities
- Can be used in single-pole (1 location) and 3-way (multi-location) applications
- Works with the SP20-RD4 or directly controls the load
- White face assembled on device, Ivory and Light Almond color change kits included



Catalog Number	Description	Finish	Voltage	UPC
WBSD-010M-C1	0-10V Preset Slide Dimmer	White	120/277 VAC	080083834983

OSW 0-10V Dimmer with Sensor

WALL SWITCH

- 3-in-1 solution that combines functionality of a switchpack, a sensor and a 0-10V dimmer
- Saves labor costs, reduces installation time and meets energy codes and standards
- 0-10V dimming with passive infrared (PIR) occupancy sensing; Surge protection built-in
- Can be used in single-pole (1 location) as well as 3-way (multi-location) applications
- Compatible with Cooper Lighting Solutions' decorator style devices and wallplates



Catalog Number	Description	Finish	Voltage	Watts	Detection Type	Coverage	UPC
OSW-P-010-W	0-10V Wallbox Dimmer, Sensor	White	120/277V	1200W/2200W	PIR	1000 sq ft.	080083758661

OSW 0-10V Dimmer with Dual Tech Sensor SENSOR

- 3-in-1 solution that combines functionality of a switchpack, a sensor and a 0-10V dimmer
- Saves labor costs, reduces installation time and meets energy codes and standards
- Ultrasonic occupancy (US) and passive infrared (PIR) sensing; Daylight harvesting
- Can be used in single-pole (1 location) as well as 3-way (multi-location) applications
- Compatible with Cooper Lighting Solutions' decorator style devices and wallplates



Catalog Number	Description	Finish	Voltage	Watts	Detection Type	Coverage	UPC
OSW-D-010-W	0-10V Dimmer, OCC Sensor	White	120/277V	960W/2,200W	PIR and Ultrasonic	1,000 sq. ft.	080083816071

ONW Switch with Sensor SENSOR

- Passive Infrared (PIR) single level occupancy sensing switch for motion sensing control
- Also a conventional wall switch; Designed for energy savings and convenience
- Detects motion from a heat-emitting source (such as a person entering a room) within its field-of-view and automatically switches lights ON
- Neutral and non-neutral wiring options for installation; Ideal for retrofit applications



Catalog Number	Description	Finish	Voltage	Watts	Detection Type	Coverage	UPC
ONW-P-1001-MV-W	PIR Wall Sensor	White	120/277V	1,200W/2,200W	PIR	1,000 sq. ft.	080083523863
ONW-D-1001-MV-W	Dual Tech Wall Sensor	White	120/277V	1,200W/2,200W	PIR and Ultrasonic	1,000 sq. ft.	080083524709
ONW-D-1001-MV-N-W	Dual Tech Wall Sensor, Neutral Required	White	120/277V	1,200W/2,200W	PIR and Ultrasonic	1,000 sq. ft.	080083524594



OAC Ceiling Mount Dual Tech SENSOR

- Combines ultrasonic and Passive Infrared (PIR) technologies, eliminates false deactivations
- MicroSet self-adjusting technology provides an adaptive and airflow tolerant technology
- Ideal for spaces that have increased airflow due to higher occupant levels
- Drastically simplifies and reduces installation and adjustment time
- Available in line-voltage and low-voltage versions; Compatible with SP20 switchpacks




Catalog Number	Description	Finish	Voltage	Watts	Detection Type	Coverage	UPC
OAC-DT-2000-MV	DT Ceiling Mount, Line Voltage	White	120-347V	1,200W-2,700W	PIR and Ultrasonic	2,000 sq ft.	080083579426
OAC-DT-2000	DT Ceiling Mount, Low Voltage	White	10-30VDC	N/A	PIR and Ultrasonic	2,000 sq ft.	080083579266
OAC-DT-2000-R	DT Ceiling Mount, Isolated Relay	White	10-30VDC	N/A	PIR and Ultrasonic	2,000 sq ft.	080083702077
OAC-DT-1000	DT Ceiling Mount, Low Voltage	White	10-30VDC	N/A	PIR and Ultrasonic	1,000 sq ft.	080083579242
OAC-DT-1000-R	DT Ceiling Mount, Isolated Relay	White	10-30VDC	N/A	PIR and Ultrasonic	1,000 sq ft.	080083702060
OAC-DT-0501	DT Ceiling Mount, Low Voltage	White	10-30VDC	N/A	PIR and Ultrasonic	500 sq ft.	080083579228
OAC-P-1500-R	PIR Ceiling Mount, Isolated Relay	White	10-30VDC	N/A	PIR	1,500 sq ft.	080083579150

OEF High Bay Fixture Mount Sensor SENSOR

- Fixture-mount high bay/low bay occupancy sensor with integrated photocell
- Provides 0-10V control and 1-100% continuous dimming
- 2 interchangeable 360° high bay and low bay lenses; specifically designed for LED fixture control
- Easy to program; Quicksnap feature for easy installation
- Suitable for use in standard and cold storage applications



Catalog Number	Description	Finish	Voltage	Watts	Detection Type	Coverage	UPC
OEF-P-010V-MV	Fixture Mount Sensor	White	120/277V	1200	PIR	1,500 sq ft.	080083758104

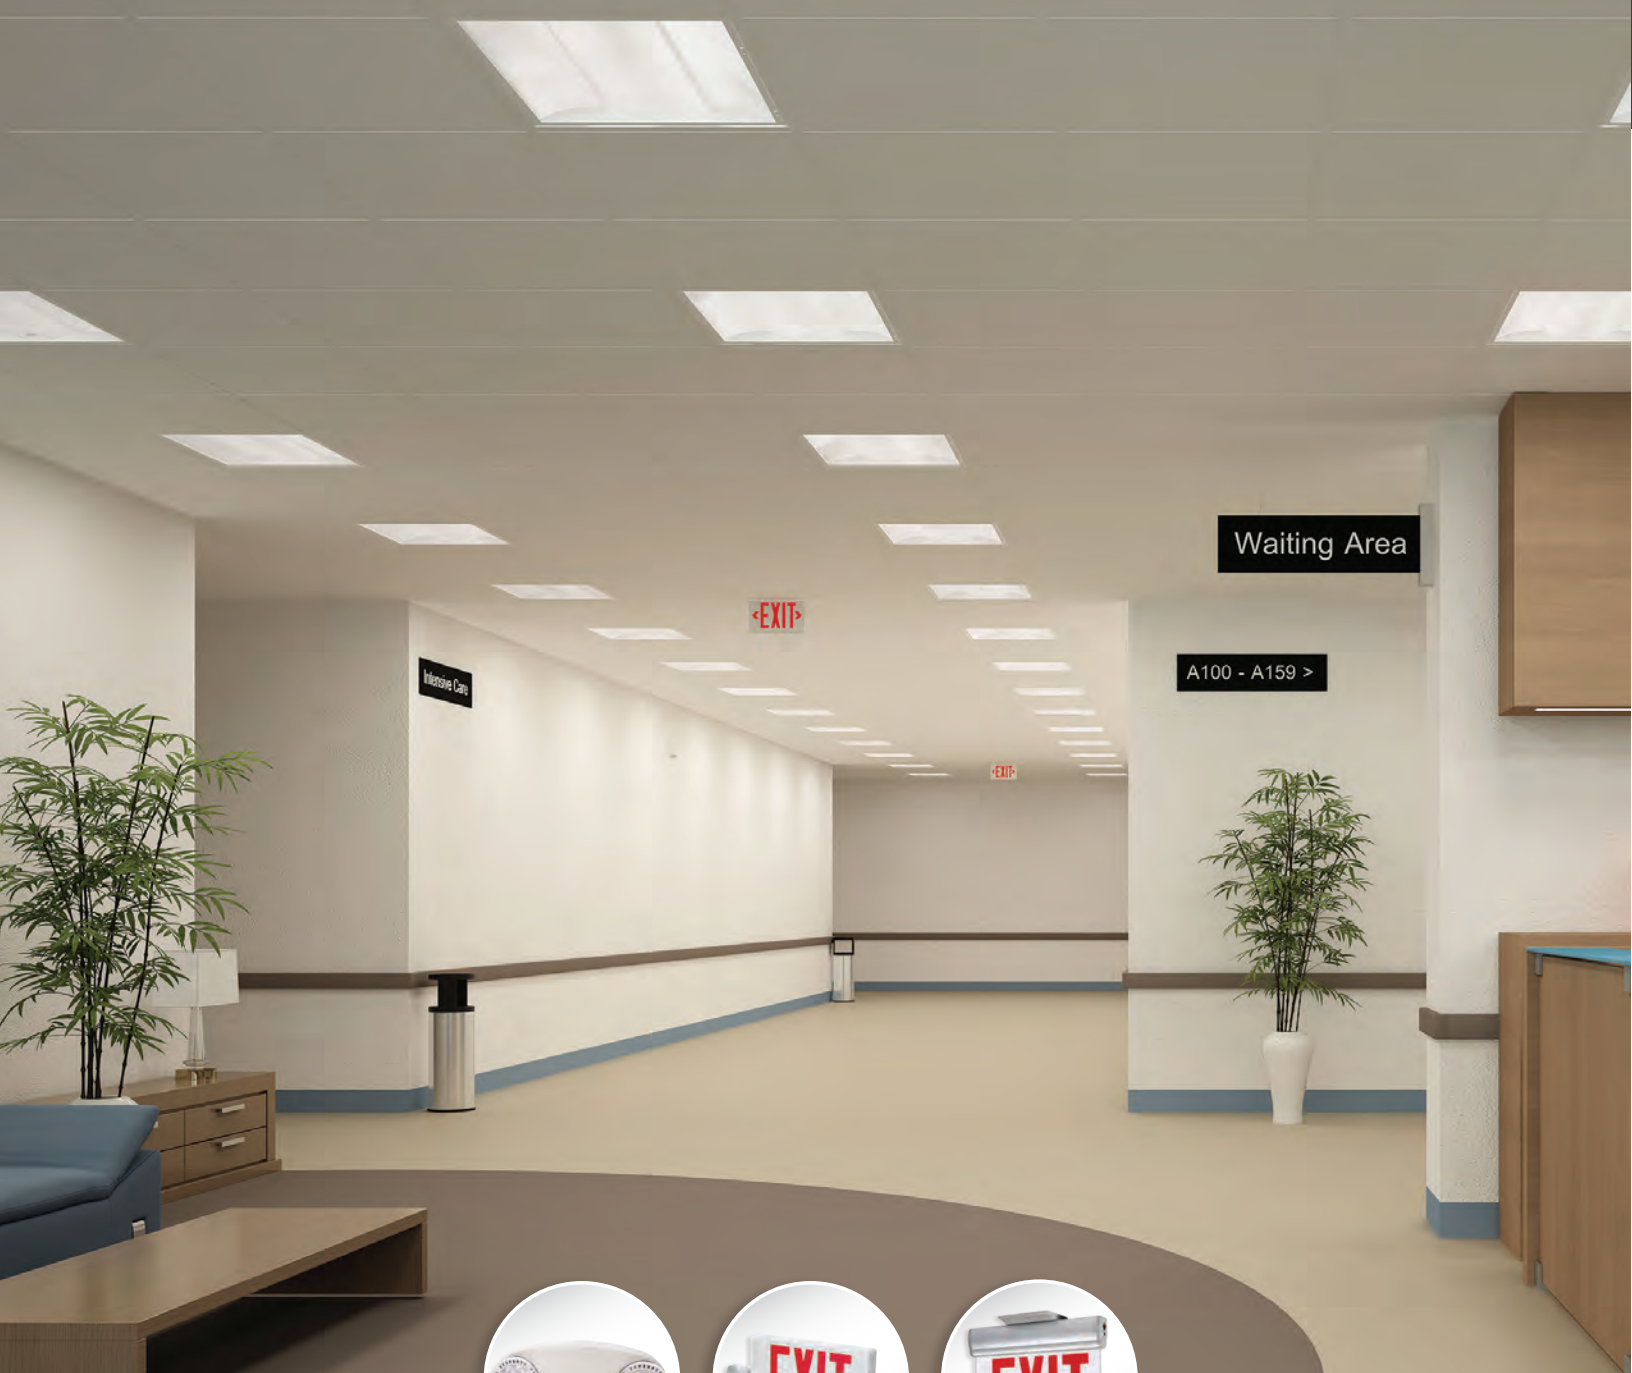

Sure-Lites
p. 57-59



All-Pro
p. 60-61



AtLite
p. 62-63

SURE-LITES ALL-PRO | ATLITE EXIT & EMERGENCY

Sure-Lites, All-Pro and AtLite offer reliable and code compliant solutions for all your exit and emergency needs.

SURE-LITES EMERGENCY LIGHTING

Innovative Design. Dependable. ▶▶▶

Sure-Lites offers emergency lighting fixtures, exit signs and battery packs, including Chicago and New York code compliant solutions ideal for commercial and industrial applications.

SELHP EMERGENCY LIGHTING

- Provides emergency lighting for a minimum of 90 minutes
- Up to 100 feet of emergency egress coverage
- Long life LED's with LiFePO4 battery, 3 watts remote capacity
- Labor savings self-diagnostics option
- Wall and ceiling mount



Catalog Number	Description	Finish	Replaces Up To	Coverage	Voltage	Watts	UPC
SELHP100R3	2 Head, LiFePO4	White	2 - 24W Hal. Heads	100 ft.	120~277V	2.6W	080083276721
SELHP100R3SD	2 Head, LiFePO4, Self Diagnostic	White	2 - 24W Hal. Heads	100 ft.	120~277V	4.6W	080083276707

SEL Series EMERGENCY LIGHTING

- Designed to reduce egress system cost and maintenance and improve reliability
- Proprietary adjustable AccuLED Optics™ and injection-molded, high-impact thermoplastic housing
- Long life LED's, no maintenance nickel cadmium battery
- EZ hang feature reduces installation time and cost
- Labor savings self-diagnostics available in SD models



Catalog Number	Description	Finish	Replaces Up To	Coverage	Voltage	Watts	UPC
SEL17	2 Head, NiCad	White	2-5.4W INC. Heads	17 ft.	120-277V	0.78W	080083722143
SEL25	2 Head, NiCad	White	2-9W INC. Heads	25 ft.	120-277V	0.6W/0.64W	080083736669
SEL25SD	2 Head, NiCad, Self-Diagnostics	White	2-9W INC. Heads	25 ft.	120-277V	0.67	080083723027
SEL50	2 Head, NiCad	White	2-12W INC. Heads	50 ft.	120-277V	1W/1.02W	080083733347
SEL50SD	2 Head, NiCad, Self-Diagnostics	White	2-12W INC. Heads	50 ft.	120-277V	1.19	080083733361

SELW Outdoor Series EMERGENCY LIGHTING

- Code compliant, wet location for outdoor use; Standard 0°C to 40°C temperature rating
- Designed to reduce egress system cost and maintenance and improve reliability
- Proprietary adjustable AccuLED Optics™; 25 feet of emergency egress coverage
- Injection-molded, high-impact thermoplastic
- Long life LED's, No maintenance nickel cadmium battery



Catalog Number	Description	Finish	Replaces Up To	Coverage	Voltage	Watts	UPC
SELW25BZ	2 Rotatable Heads, NiCad	Bronze	2-9W INC Heads	25 ft.	120-277V	1.4	080083764037

SURE-LITES EMERGENCY LIGHTING

LPX Series

EXIT SIGNAGE

- Injection-molded polycarbonate housing
- Field-Selectable for single or double face; red or green illumination
- Snap-out or snap-in chevron directional indicators
- EZ key external battery disconnect



Catalog Number	Description	Finish	Voltage	Watts	UPC
LPX7	Self Powered, Univ. Red and Green	White	120/277V	0.98W/1.03W	080083532773

LPXC SERIES

EMERGENCY LIGHTING

- Injection-molded polycarbonate housing
- Field-Selectable for single or double face; red or green illumination
- Snap-out or snap-in chevron directional indicators
- EZ key external battery disconnect



Catalog Number	Description	Finish	Replaces Up To	Coverage	Voltage	Watts	UPC
LPXC25	2 Heads, Univ. Red and Green, Remote Cap.	White	2-9W INC Heads	25 ft.	120/277V	3.2 W at 277 V	080083770922

CHX Series

EXIT SIGNAGE

- Chicago code compliant exits are ideal for general purpose applications
- Extensive range of field-installed accessories and choice of faces
- Lens installs from side of fixture for convenient maintenance
- Steel canopy allows ceiling or end mounting
- Rear universal pattern knockouts for direct mounting to j-box



Catalog Number	Description	Finish	Replaces Up To	Coverage	Voltage	Watts	UPC
CHX60	AC Powered, Steel	White	2-12 W INC Heads	N/A	120/277V	3	080083573615
CHX61	AC Powered, Steel	White	2-12 W INC Heads	N/A	120/277V	3	080083574629
CHX70	Self Powered, Steel	White	2-12 W INC Heads	N/A	120/277V	3	080083576753
CHX71	Self Powered, Steel	White	2-12 W INC Heads	N/A	120/277V	3	080083567614
CHXC71	Self Powered Combo Unit, Steel	White	2-12 W INC Heads	60 ft.	120/277V	3.6	080083771271

SURE-LITES EMERGENCY LIGHTING

SCX Complete Edge Lit Exit

EXIT SIGNAGE

- Universal mount: surface ceiling, wall, end mount, recessed ceiling and wall mount
- Pivot housing for sloped ceiling or back wall mount
- Single-sided clear and double-sided mirror lens panels included
- Bright red or green LED sources
- Battery backup models provide 90 minutes of emergency run time



Catalog Number	Description	Finish	Replaces Up To	Coverage	Voltage	Watts	UPC
SCX70R	Self Powered, Red Aluminum	Satin Aluminum	N/A	N/A	120/277V	3.14	080083277704
SCX70G	Self Powered, Green Aluminum	Satin Aluminum	N/A	N/A	120/277V	2.94	080083277728

XR Series

EMERGENCY LIGHTING

- Emergency light with minimum of 90 minutes runtime; Chicago and New York City compliant
- 20-gauge sheet metal housing; Heads are fully adjustable and 300 lumens each
- Designed to reduce egress system cost and maintenance and improve reliability
- Proprietary adjustable AccuLED Optics™, No maintenance nickel cadmium battery
- External battery disconnect and EZ Hang feature reduces installation time and cost



Catalog Number	Description	Finish	Replaces Up To	Coverage	Voltage	Watts	UPC
XR6C-LED	Steel, NiCad	White	2-12W INC Heads	60 ft.	120-277V	1.7	080083753215

EBP Series

EMERGENCY BATTERY PACKS

- Battery Pack automatically switches to emergency mode when AC power fails
- Maintains illumination of a fixture for a minimum of 90 minutes
- UL 924 classified for field retrofit installation
- Labor savings self-diagnostics available in SD models



LED Emergency Battery Pack



Fluorescent Emergency Battery Pack



LED Emergency Battery Pack

Catalog Number	Description	Voltage	Watts	UPC
EBPLED7W	LED Emergency Battery Pack	120/277V	7	080083732265
EBPLED14W	LED Emergency Battery Pack	120/277V	14	080083732272
EBPLED-7.5WSD	LED Emergency Battery Pack, Self-Diagnostics	120/277V	7.5	080083158621
EBPLEDLP-10WSD	LED Emergency Battery Pack, Self-Diagnostics	120/277V	10	080083158645
EBPLED14WSD	LED Emergency Battery Pack, Self-Diagnostics	120/277V	14	080083191529

Fluorescent Emergency Battery Pack

Catalog Number	Description	Voltage	Watts	UPC
EBP500	Fluorescent Emergency Battery Pack	120/277V	2.7	080083906741
EBP1400	Fluorescent Emergency Battery Pack	120/277V	3.8	080083912162

ALL-PRO EMERGENCY LIGHTING

Compact Design. Value Focused. ▶▶▶

All-Pro offers a broad line of compact and affordable LED emergency lighting fixtures designed for commercial and industrial applications.

AP2SQLED30 Series EMERGENCY LIGHTING

- Next generation square head emergency light
- Provides up to 30 feet of egress coverage for 90 minutes
- Each adjustable square head outputs 80 lumens
- No maintenance nickel cadmium battery
- Universal j-box mounting pattern and snap-fit polycarbonate housing



Catalog Number	Description	Finish	Replaces Up To	Coverage	Voltage	Watts	UPC
AP2SQLED30	2 Head, NiCad 30' Egress	White	2-9W INC Heads	30 ft.	120/277V	2 at 277V	080083264285

APEL Series EMERGENCY LIGHTING

- Emergency light with a minimum of 90 minutes of run time
- No maintenance nickel cadmium battery
- Fully adjustable LED heads maximizes design flexibility
- Components are injection-molded, high impact thermoplastic
- Universal j-box mounting pattern and snap-fit housing



Catalog Number	Description	Finish	Replaces Up To	Coverage	Voltage	Watts	UPC
APEL	2 Head, NiCad	White	2-5.4W INC Heads	17 ft.	120/277V	0.47W at 277V	080083566501
APELH2	2 Head, Nicad, Remote Capacity	White	4-5.4W INC Heads	34 ft. *	120/277V	0.8 W at 277 V	080083804986

*Egress coverage with APELH2 + Remote head units.

APELMINI EMERGENCY LIGHTING

- Provides emergency lighting for a minimum of 90 minutes
- Up to 17 feet of emergency egress coverage
- Compact, high impact thermoplastic housing: 5-1/4" x 4-3/4"
- Universal J-box mounting pattern, three conduit entry points
- Operating temperature range of 10°C to 40°C



Catalog Number	Description	Finish	Replaces Up To	Coverage	Voltage	Watts	UPC
APELMINI	2 Head, NiCad	White	2-5.4W INC Heads	17 ft.	3.6V	1.5W	080083250776

ALL-PRO EMERGENCY LIGHTING

APX Series EMERGENCY LIGHTING

- Economical LED exit sign for general purpose applications
- Durable, injection-molded, thermoplastic material resists discoloration
- Field-Selectable red or green LEDs and faces
- Universal configurations (single- and double-face); Universal mounting (ceiling, wall and end)



Catalog Number	Description	Finish	Voltage	Watts	UPC
APX7RG	Self Powered, Unv. Red/Green	White	120/277V	1.05W at 277V	080083281107

APC Combo Series EMERGENCY LIGHTING

- Economical LED combo unit; Exit and LED emergency lighting heads
- Durable, injection-molded, thermoplastic material resists discoloration
- Field-Selectable red or green LEDs and faces
- Universal configurations (single- and double-face); Universal mounting (ceiling, wall and end)
- Low-voltage disconnect, Line-Latched; Brownout circuit



Catalog Number	Description	Finish	Replaces Up To	Coverage	Voltage	Watts	UPC
APC7RG	2 Heads, Unv. Red/Green	White	2-5.4W Inc. Heads	17 ft.*	120/277V	4.04W at 277V	080083280827
APCH7RG	2 Heads, Unv. Red/Green, Remote Cap.	White	4-5.4W Inc. Heads	34 ft.*	120/277V	3.79W at 277V	080083280865

*Egress coverage with APCH + Remote head units.

APWR Series EMERGENCY LIGHTING

- Emergency lighting remote heads unit; Allows for 17 feet of emergency egress coverage
- Adjustable heads adjust 80° from vertical with 358° rotation
- Wet location listed and can be used indoors or outdoors
- Injection-molded thermoplastic material
- Universal mounting plate; Flame-resistant and impact-resistant



Catalog Number	Description	Finish	Replaces Up To	Coverage	Voltage	Watts	UPC
APWR2	Remote Emergency Lamps, 2 Heads	White	2-5.4W INC. Heads	17 ft.	3.6V	1W	080083608584

ATLITE EXIT SIGNAGE

Durable Design. Built-to-Last. ▶▶▶

AtLite offers durable and dependable emergency lighting and exits for commercial and industrial applications that are also approved for the New York City market.

RCS Combo Series EXIT SIGNAGE

- New York City compliant LED combo exit sign
- Heavy-duty, 20-gauge steel housing and face plate provides durability
- Energy-efficient, long-life LED's; illuminated by field-replaceable LED strip
- Single or double face with maximum of three heads for ultimate flexibility



Catalog Number	Description	Finish	Replaces Up To	Voltage	Watts	UPC
RCS182LED	Steel Combo, 1 Face, 2 Heads	White	2 12W INC. Heads	120/277V	N/A	080083574322
RCS183LED	Steel Combo, 1 Face, 3 Heads	White	3 12W INC. Heads	120/277V	N/A	080083574308
RCS282LED	Steel Combo, Double Face, 2 Heads	White	2 12W INC. Heads	120/277V	N/A	080083574315
RCS283LED	Steel Combo, Double Face, 3 Heads	White	3 12W INC. Heads	120/277V	N/A	080083574292

Rival RXS Series EXIT SIGNAGE

- New York City compliant steel LED exit sign
- Heavy-duty, 20-gauge steel housing with canopy
- Energy-efficient, long-life LED's; illuminated by field-replaceable LED strip
- Universal configurations (single- and double-face); Universal mounting (ceiling, wall and end)



Catalog Number	Description	Finish	Voltage	Watts	UPC
RXSN8RU	Steel Exit, Self Powered, Univ. Face	White	120/277V	5	080083634576

REL Series EMERGENCY LIGHTING

- New York City compliant steel LED emergency light
- Heavy-duty, 20-gauge steel housing and face plate for maximum durability
- Long-lasting, high-efficiency LED heads; maintenance-free nickel cadmium battery
- Brownout protection; low-voltage disconnect



Catalog Number	Description	Finish	Replaces Up To	Voltage	Watts	UPC
10REL36-LED42	Steel Emergency Light, 2 Heads, 2 Remotes	White	2 9W INC. Heads	120/277V	5	080083574353
10REL72-LED83	Steel Emergency Light, 3 Heads, 5 Remotes	White	2 9W INC. Heads	120/277V	5	080083574339

ATLITE EXIT SIGNAGE

ATLEMINI Series EMERGENCY LIGHTING

- New York City compliant LED emergency light with 90 minutes of run time
- J-box and conduit knockouts for easy installation; wall or ceiling mount applications
- Long-lasting, energy-efficient LED heads; maintenance-free nickel cadmium battery
- Available with two or three 80 lumen rotatable heads



T20 Certified to California Title 20 Appliance Database



Catalog Number	Description	Finish	Replaces Up To	Coverage	Voltage	Watts	UPC
ATLEMINI-2H	Steel Emergency Light, 2 Heads	White	5.4 W INC	18 ft.	120-277V	0.78 W	080083836079

AUX Edge-Lit Exit Series EXIT SIGNAGE

- Edge-lit Exit allows seamless presence in architecturally significant surroundings
- Labor savings self-diagnostics, New York City compliant
- Universal mounting; Universal Lens (clear, mirror, white and single- and double-sided)
- Ordering and installation simplified as all housing and lens options are included



T20 Certified to California Title 20 Appliance Database



Catalog Number	Description	Finish	Voltage	Watts	UPC
AUXSSD	Unv. Self Powered, Self-Diag.	Silver	120/277V	1.1 at 277 V	080083703296
AUXSSD6	Unv. Edge Lit, Self Powered	Silver	120/277V	0.9/1.1W	080083718115
AUXSSD-SP PACK	Unv. Self Powered, Self-Diag., Single Pack	Silver	120/277V	1.1 at 277 V	080083848669

ACX Complete Edge Lit Exit EXIT SIGNAGE

- Surface ceiling, wall, end mount, recessed ceiling and wall mount
- Pivot housing for sloped ceiling or back wall mount
- NYC Compliant 8" letter single-sided clear and double-sided mirror lens panels included
- Battery backup models provide 90 minutes of emergency run time
- NFPA approved field installable directional chevrons included



T20 Certified to California Title 20 Appliance Database



Catalog Number	Description	Finish	Replaces Up To	Coverage	Voltage	Watts	UPC
ACXN0R	Self Powered, Aluminum	Satin Aluminum	N/A	N/A	120/277 V	3.14	080083277742



Wall Mounts
p. 65, 68-69



Floodlight
p. 66, 70-74



Ceiling Mount
p. 66



Area/Site
p. 67, 69-70

LUMARK & LUMARK AP OUTDOOR LED LUMINAIRES

Lumark brands offer a wide selection of high-quality product solutions that provide market-leading ease of installation, superior area safety, and maximum energy savings in commercial and industrial spaces.

LUMARK AP WALL MOUNTS

Lumark AP provides high-value outdoor lighting products that are in stock and supported with decades of experience and expertise in the industry.



ASWP Adjustable Slim Wall Pack Luminaire WALL MOUNT

- Adjustable slim wall pack available in small and medium sizes
- 3-color selectable CCT: 3000K, 4000K, 5000K; 70CRI
- Lumen packages range from 2,100-10,200 lumens
- Internal toggle switches to easily adjust luminaire CCT and lumens
- Integrated button type photocontrol for dusk-to-dawn operation



Catalog Number	Description	Finish	Replaces Up To	Selectable CCT	Voltage	Selectable Lumens	Watts	UPC	DLC Product ID
ASWPLED1S	Small LED Wall Pack	Bronze	155W HID	3000K-5000K	120-347V	2,000-4,000	15-30W	080083265169	S-YWC5DG
ASWPLED2S	Medium LED Wall Pack	Bronze	375W HID	3000K-5000K	120-347V	5,000-10,000	40-75W	080083265183	S-9DIVKW

Note: DLC Premium items are noted in bold.

WPM Wall Pack Luminaire WALL MOUNT

- LED wall pack available with fixed output or selectable configurations
- Die-cast aluminum housing with hinged, removable die-cast aluminum door
- Heat and impact resistant borosilicate glass lens
- Energy and maintenance savings up to 89%
- Ideal for pathway illumination, building entrances, vehicle ramps, schools, tunnels, stairways and loading docks



Catalog Number	Description	Finish	Replaces Up To	Selectable CCT	Voltage	Selectable Lumens	Watts	UPC	DLC Product ID
WPMLED15S	Medium LED Wall Pack	Bronze	150W HID	3000K-5000K	120-347V	3,977-7,535	29-59	080083176144	PLAP4BWH9V52
WPMLED25S	Medium LED Wall Pack	Bronze	250W HID	3000K-5000K	120-347V	9,779-12,829	72-101	080083176168	PLCDOB65Z8EN

LUMARK AP FLOODLIGHT | CEILING MOUNT

LSF Selectable Flood Luminaire FLOODLIGHT

- Available in 3 housing sizes and multiple lumen packages
- 3-color selectable CCT: 3000K, 4000K, 5000K; 70CRI
- Lumen packages ranging from 1,700-20,000 lumens
- Knuckle, slipfitter, trunnion and yoke mounting types
- Integrated button type photocontrol for dusk-to-dawn operation



Catalog Number	Description	Finish	Replaces Up To	Selectable CCT	Voltage	Selectable Lumens	Watts	UPC	DLC Product ID
LSF25-KN-PC	Knuckle Mount, Photocontrol	Bronze	155W HID	3000K-5000K	120-347V	1,700-4,000	11-25W	080083267705	S-W43YTM
LSF65-KN-PC	Knuckle Mount, Photocontrol	Bronze	375W HID	3000K-5000K	120-347V	5,000-10,000	25-65W	080083267729	S-5HK1XN
LSF120-SF-PC	Slipfitter Mount, Photocontrol	Bronze	450W HID	3000K-5000K	120-347V	9,000-20,000	50-120W	080083267743	S-M4YHAF
LSF25-YK-PC	Yoke Mount, Photocontrol	Bronze	155W HID	3000K-5000K	120-347V	1,700-4,000	11-25W	080083267767	S-W43YTM
LSF65-YK-PC	Yoke Mount, Photocontrol	Bronze	375W HID	3000K-5000K	120-347V	5,000-10,000	25-65W	080083267781	S-5HK1XN
LSF120-TR-PC	Trunnion Mount, Photocontrol	Bronze	450W HID	3000K-5000K	120-347V	9,000-20,000	50-120W	080083267804	S-M4YHAF

Note: DLC Premium items are noted in bold.

CLCS Canopy Luminaire CEILING MOUNT

- LED canopy available with fixed output or selectable configurations
- 3-color selectable CCT: 3000K, 4000K, 5000K
- High-performance, energy-efficient illumination
- Energy and maintenance savings up to 86% versus HID solutions
- Ideal for new or existing spaces including bank, retail, drive-thru, covered sidewalks and hospital entryways



Selectable CCT & Lumens

Catalog Number	Description	Finish	Replaces Up To	Selectable CCT	Voltage	Selectable Lumens	Watts	UPC	DLC Product ID
CLCS17S	Small LED Canopy	Bronze	175W HID	3000K-5000K	120-277V	5,323-7,939	39-56	080083160006	P5MUAJIY, P5S4B75K
CLCS17S-PC	Small LED Canopy	Bronze	175W HID	3000K-5000K	120-277V	5,323-7,939	39-56	080083159727	P5MUAJIY
CLCS40S	Large LED Canopy	Bronze	400W HID	3000K-5000K	120-277V	12,614-17,427	91-123	080083160020	PUT80LSK, PPEWK64B

Dedicated CCT & Lumens

Catalog Number	Description	Finish	Replaces Up To	CCT	Voltage	Lumens	Watts	UPC	DLC Product ID
CLCS15	Small LED Canopy	Bronze	150W HID	4000K	120-277V	5,671	39	080083161003	PAVO9EAO
CLCS17	Small LED Canopy	Bronze	175W HID	4000K	120-277V	7,956	56	080083161041	P3KXJQWI

LAS Luminaire

AREA/SITE

- Automatic dusk-to-dawn area lighting with included twistlock photocontrol
- 10-position, Field-Selectable lumens across 2 die-cast aluminum housing sizes
- Energy and maintenance savings up to 79% versus HID solutions up to 79%
- Pole mount arm or adjustable slipfitter mounting arm included
- Ideal parking lots, walkways, building areas and other outdoor areas



Catalog Number	Description	Finish	Replaces Up To	CCT	Voltage	Selectable Lumens	Watts	UPC	DLC Product ID
LAS45S-T3	T3 Distr., Adjustable Slipfitter Arm	Bronze	450W HID	4000K	120-277V	4,900-20,000	30-153	080083155804	P1T4HG08
LAS45P-T3	T3 Distr., Pole Mount Arm	Bronze	450W HID	4000K	120-277V	4,900-20,000	30-153	080083248360	P1T4HG08
LAS45S-T4	T4 Distr., Adjustable Slipfitter Arm	Bronze	450W HID	4000K	120-277V	4,900-20,000	30-153	080083155828	PJZT423
LAS45P-T4	T4 Distr., Pole Mount Arm	Bronze	450W HID	4000K	120-277V	4,900-20,000	30-153	080083248384	PJZT423
LAS45S-T5	T5 Distr., Adjustable Slipfitter Arm	Bronze	450W HID	4000K	120-277V	4,900-20,000	30-153	080083155842	PW39PQB3
LAS45P-T5	T5 Distr., Pole Mount Arm	Bronze	450W HID	4000K	120-277V	4,900-20,000	30-153	080083248704	PW39PQB3
LAS100S-T3	T3 Distr., Adjustable Slipfitter Arm	Bronze	1,000W HID	4000K	120-277V	8,200-34,000	48-251	080083155866	PP8AW4F5
LAS100P-T3	T3 Distr., Pole Mount Arm	Bronze	1,000W HID	4000K	120-277V	8,200-34,000	48-251	080083248780	PP8AW4F5
LAS100S-T4	T4 Distr., Adjustable Slipfitter Arm	Bronze	1,000W HID	4000K	120-277V	8,200-34,000	48-251	080083155880	P0CHU9AS
LAS100P-T4	T4 Distr., Pole Mount Arm	Bronze	1,000W HID	4000K	120-277V	8,200-34,000	48-251	080083248803	P0CHU9AS
LAS100S-T5	T5 Distr., Adjustable Slipfitter Arm	Bronze	1,000W HID	4000K	120-277V	8,200-34,000	48-251	080083155903	PMUFIF4F
LAS100P-T5	T5 Distr., Pole Mount Arm	Bronze	1,000W HID	4000K	120-277V	8,200-34,000	48-251	080083248827	PMUFIF4F

Note: DLC Premium items are noted in bold.




LUMARK WALL MOUNTS

Lumark combines value-engineered, specification-grade lighting features with market-leading retrofit installation solutions, to enable contractors to get on and off the job quickly and deliver superior illumination coverage.



AXC Axcent Luminaire WALL MOUNT

- Full cutoff and refractive LED lens models available in small or large
- Hook-N-Lock mechanism for quick, easy installation
- Die-cast aluminum construction with energy-efficient illumination
- Gasketed housing and sealed optical compartment making impervious to contaminants
- Ideal for pathway illumination and floodlighting applications



Catalog Number	Description	Finish	Replaces Up To	CCT	Voltage	Lumens	Watts	UPC	DLC Product ID
AXCS1A	Small Full Cutoff	Carbon Bronze	70W HID	4000K	120-277V	1,806	14	080083887965	S-3SJJYCL
AXCS2A	Small Full Cutoff	Carbon Bronze	100W HID	4000K	120-277V	2,561	21	080083887989	S-0Y08BE
AXCS3A	Small Full Cutoff	Carbon Bronze	150W HID	4000K	120-277V	3,537	27	080083888009	S-H7120V
AXCS4A	Small Full Cutoff	Carbon Bronze	250W HID	4000K	120-277V	5,520	44	080083888023	PI16J9UO
AXCS4ARL	Small Refractive Lens	Carbon Bronze	250W HID	4000K	120-277V	5,858	44	080083888030	PPXSGJ9K, PCFKRFBV
AXCS5A	Small Full Cutoff	Carbon Bronze	320W HID	4000K	120-277V	6,300	52	080083888047	PCPDYSZM
AXCL6A	Large Full Cutoff	Carbon Bronze	320W HID	4000K	120-277V	7,594	56	080083811564	PLXS8Y3B
AXCL6ARL	Large Refractive Lens	Carbon Bronze	320W HID	4000K	120-277V	7,809	56	080083811649	PZXNXUOI
AXCL8A	Large Full Cutoff	Carbon Bronze	400W HID	4000K	120-277V	9,696	72	080083811588	PG4TJNY3
AXCL8ARL	Large Refractive Lens	Carbon Bronze	400W HID	4000K	120-277V	9,970	72	080083811663	PBA84MB6
AXCL10A	Large Full Cutoff	Carbon Bronze	400W HID	4000K	120-277V	13,283	102	080083811601	P5X06GE7
AXCL12A	Large Full Cutoff	Carbon Bronze	450W HID	4000K	120-277V	16,823	123	080083811625	PD1N4D39

Note: DLC Premium items are noted in bold.

AXC Back Box Accessory

Catalog Number	Description	Finish	UPC
BB/AXC	Back Box	Carbon Bronze	080083160709
BB/AXC-PC	Back Box with Photocontrol	Carbon Bronze	080083160723

- Features**
- Lumen Select pack allows installer to reduce the light output to 75 or 50%
 - Integrated photocontrol provides maximum energy savings while leveraging
 - Four 1/2" NPT conduit entry points for surface mounted conduit
 - Single die-cast aluminum back box to simultaneously accommodate Axcent Small and Large housings



XTOR Crosstour Luminaire WALL MOUNT

- Architectural style with super bright, energy-efficient LEDs
- Low-profile, rugged die-cast aluminum construction and stainless steel hardware
- Universal back box with sealed and gasketed optical compartment
- Wall, surface, post, bollard, low-level, inverted, floodlight mounting
- Ideal for multi-use facilities, pathway illumination and building entrances



Catalog Number	Description	Finish	Replaces Up To	CCT	Voltage	Lumens	Watts	UPC	DLC Product ID
XTOR1B	Small Full Cutoff	Carbon Bronze	70W HID	5000K	120-277V	1,418	12	080083777969	PRVAZAZR
XTOR2B	Small Full Cutoff	Carbon Bronze	100W HID	5000K	120-277V	2,135	18	080083778225	PGP4FYV3
XTOR3B	Small Full Cutoff	Carbon Bronze	150W HID	5000K	120-277V	2,751	26	080083778041	PWFZHYJH
XTOR4B	Medium Full Cutoff	Carbon Bronze	250W HID	5000K	120-277V	4,269	38	080083778003	PUJ1NXGY
XTOR6B	Large Full Cutoff	Carbon Bronze	320W HID	5000K	120-277V	6,129	58	080083774807	S-X7BH39
XTOR6B-PC1	Large Full Cutoff with Photocontrol	Carbon Bronze	320W HID	5000K	120-277V	6,129	58	080083774845	S-X7BH39
XTOR6BRL	Large Refractive Lens	Carbon Bronze	320W HID	5000K	120-277V	6,225	58	080083774821	N/A
XTOR8B	Large Full Cutoff	Carbon Bronze	400W HID	5000K	120-277V	8,502	81	080083774814	P5557CRH
XTOR8B-PC1	Large Full Cutoff with Photocontrol	Carbon Bronze	400W HID	5000K	120-277V	8,502	81	080083774869	P5557CRH
XTOR8BRL	Large Refractive Lens	Carbon Bronze	400W HID	5000K	120-277V	8,635	81	080083774852	N/A

CTKR Caretaker Luminaire AREA/SITE

- Rugged die-cast housing for durability in security applications
- Uniform distribution with excellent vertical illumination for maximum light coverage
- Wall/pole-mount bracket and integral slipfitter for versatility in mounting
- Versatile universal mounting plate allows quick and easy installation
- Low-cost, low-maintenance solution for residential street lighting, perimeter area lighting, parking areas, loading platforms, boat docks, access drives or pathways



Catalog Number	Description	Finish	Replaces Up To	CCT	Voltage	Lumens	Watts	UPC	DLC Product ID
CTKR1B	Area site with PC, UNV Mount Arm	Raw	150W HID	4000K	120-277V	4,515	29	080083865390	P9G7NN3C
CTKR2B	Area site with PC, UNV Mount Arm	Raw	175W HID	4000K	120-277V	7,110	50	080083865406	PRSAJP8E
CTKR3B	Area site with PC, UNV Mount Arm	Raw	250W HID	4000K	120-277V	9,741	71	080083865413	P3P0FHML
SR-CARETAKER	Small Acrylic Refractor	Clear	N/A	N/A	N/A	N/A	N/A	080083699087	N/A

Note: DLC Premium items are noted in bold.

PRV Prevail Luminaire

AREA/SITE

- Provides a new level of performance, versatility and value
- Low-profile, architectural design with a die-cast aluminum housing
- Versatile mount arm includes multiple drill patterns, round and square poles
- Simple retrofit installation; Reduces installation time and provides labor savings
- Ideal for general area lighting such as parking lots, walkways, roadways and building areas



Catalog Number	Description	Finish	Replaces Up To	CCT	Voltage	Lumens	Watts	UPC	DLC Product ID
PRVS-C25-UNV-T3	T3 Distr., STD Arm Mount	Bronze	250W HID	4000K	120-277V	13,183	96	080083897308	S-43K2M0
PRVS-C25-UNV-T4	T4 Distr., STD Arm Mount	Bronze	250W HID	4000K	120-277V	13,140	96	080083897322	S-CXYVFA
PRVS-C40-UNV-T3	T3 Distr., STD Arm Mount	Bronze	400W HID	4000K	120-277V	17,144	131	080083897346	S-YEWL3K
PRVS-C40-UNV-T4	T4 Distr., STD Arm Mount	Bronze	400W HID	4000K	120-277V	17,087	131	080083897360	S-L5W8VA
PRVS-C60-UNV-T3	T3 Distr., STD Arm Mount	Bronze	450W HID	4000K	120-277V	20,050	153	080083897384	S-NS95Z4
PRVS-C60-UNV-T4	T4 Distr., STD Arm Mount	Bronze	450W HID	4000K	120-277V	19,984	153	080083897421	S-RAGPH4

Note: DLC Premium items are noted in bold.

NFFLD Night Falcon Luminaire

FLOODLIGHT

- Cost-effective LED floodlight available in medium or large sizes
- Precision engineered and high-efficiency optics delivers superior uniformity
- Compact, robust die-cast aluminum housing, driver compartment and door
- 6H x 6V NEMA wide distribution
- Ideal for area lighting for security, building facade and signage



Catalog Number	Description	Finish	Replaces Up To	CCT	Voltage	Lumens	Watts	UPC	DLC Product ID
NFFLD-S-C15-T-UNV	Small, Trunnion	Carbon Bronze	150W HID	4000K	120-277V	5,797	51	080083760275	P07DFEUO
NFFLD-S-C15-KNC-UNV	Small, Knuckle	Carbon Bronze	150W HID	4000K	120-277V	5,797	51	080083760268	P07DFEUO
NFFLD-C25-S	Medium, Slipfitter	Carbon Bronze	250W HID	4000K	120-277V	10,530	85	080083801244	P5JBKNFS
NFFLD-C25-T	Medium, Trunnion	Carbon Bronze	250W HID	4000K	120-277V	10,530	85	080083801220	P5JBKNFS
NFFLD-C40-S	Medium, Slipfitter	Carbon Bronze	400W HID	4000K	120-277V	16,932	128	080083801206	PCHBI5F8
NFFLD-C40-T	Medium, Trunnion	Carbon Bronze	400W HID	4000K	120-277V	16,932	128	080083801183	PCHBI5F8
NFFLD-L-C100-S	Large, Slipfitter	Carbon Bronze	1,000W HID	4000K	120-277V	33,941	252	080083800889	P53SWTBG
NFFLD-L-C100-T	Large, Trunnion	Carbon Bronze	1,000W HID	4000K	120-277V	33,941	252	080083800902	P53SWTBG

Note: DLC Premium items are noted in bold.

LUMARK FLOODLIGHT

NHR Night Harrier FLOODLIGHT

- Cutting edge innovated design offering years of maintenance-free service
- 3-color selectable CCT: 3000K, 4000K, 5000K
- Lumen packages ranging from 5,500-22,000 lumens
- Slipfitter and trunnion mounting types
- Ideal for area lighting such as facade, wall washing, building and sign lighting



Catalog Number	Description	Finish	Replaces Up To	Selectable CCT	Voltage	Selectable Lumens	Watts	UPC	DLC Product ID
NHRS50UT	Trunnion Mount	Bronze	70W to 500W HID	3000K-5000K	120-277V	5,500-22,000	40-155W	080083283903	Pending
NHRS50US	Slipfitter Mount	Bronze	70W to 500W HID	3000K-5000K	120-277V	5,500-22,000	40-155W	080083283910	Pending
NHRS50HT	Trunnion Mount	Bronze	70W to 500W HID	3000K-5000K	120-277V	5,500-22,000	40-155W	080083283927	Pending
NHRS50HS	Slipfitter Mount	Bronze	70W to 500W HID	3000K-5000K	120-277V	5,500-22,000	40-155W	080083283934	Pending
NHRS50UT-BPC	Trunnion Mount, Photocontrol	Bronze	70W to 500W HID	3000K-5000K	120-277V	5,500-22,000	40-155W	080083283941	Pending
NHRS50US-BPC	Slipfitter Mount, Photocontrol	Bronze	70W to 500W HID	3000K-5000K	120-277V	NHRS50UT-BPC	40-155W	080083283958	Pending



HALO FLOODLIGHT

TGS Series – Single Head

SECURITY FLOODLIGHT

- Three different brightness levels using Lumen Select Technology
- Durable die-cast aluminum square head with UV resistant lens
- Easy install to wall or eave mounting, with integrated easy connector
- Switch activated, Dusk-to-Dawn, and motion activated models available
- Ideal for security lighting in residential and commercial applications



Dusk-To-Dawn models available



with sensor

Catalog Number	Description	Finish	Replaces Up To	CCT	Voltage	Selectable Lumens	Watts	UPC	Energy Star ID
TGS3S401FSRB	Single Head Square	Bronze	180W INC	4000K	120V	1,700-3,500	27	080083913169	Pending
TGS3S401FSRW	Single Head Square	White	180W INC	4000K	120V	1,700-3,500	27	080083912971	Pending
TGS3S401DSRB	Single Head Square, D2D	Bronze	180W INC	4000K	120V	1,700-3,500	27	080083913268	Pending
TGS3S401DSRW	Single Head Square, D2D	White	180W INC	4000K	120V	1,700-3,500	27	080083912995	Pending
TGS3S401MSRB	Single Head Square, Motion	Bronze	180W INC	4000K	120V	1,700-3,500	27	080083913015	Pending
TGS3S401MSRW	Single Head Square, Motion	White	180W INC	4000K	120V	1,700-3,500	27	080083260089	Pending

TGS Series – Twin Head

SECURITY FLOODLIGHT

- Three different brightness levels using Lumen Select Technology
- Durable die-cast aluminum square head with UV resistant lens
- Easy install to wall or eave mounting, with integrated easy connector
- Switch activated, Dusk-to-Dawn, and motion activated models available
- Ideal for security lighting in residential and commercial applications



Dusk-To-Dawn models available



with sensor
also available in square head

Catalog Number	Description	Finish	Replaces Up To	CCT	Voltage	Selectable Lumens	Watts	UPC	Energy Star ID
TGS2S402FRRB	Twin Head Round	Bronze	180W INC	4000K	120V	1,500-2,500	22	080083913053	Pending
TGS2S402FRRW	Twin Head Round	White	180W INC	4000K	120V	1,500-2,500	22	080083913374	Pending
TGS2S402DRRB	Twin Head Round, D2D	Bronze	180W INC	4000K	120V	1,500-2,500	22	080083913435	Pending
TGS2S402DRRW	Twin Head Round, D2D	White	180W INC	4000K	120V	1,500-2,500	22	080083913459	Pending
TGS2S402MRRB	Twin Head Round, Motion	Bronze	180W INC	4000K	120V	1,500-2,500	22	080083913510	Pending
TGS2S402MRRW	Twin Head Round, Motion	White	180W INC	4000K	120V	1,500-2,500	22	080083913534	Pending
TGS2S402MSRB	Twin Head Square, Motion	Bronze	180W INC	4000K	120V	1,500-2,500	22	080083913558	Pending
TGS2S402MSRW	Twin Head Square, Motion	White	180W INC	4000K	120V	1,500-2,500	22	080083913572	Pending

HALO FLOODLIGHT

TGS Series – Triple Head SECURITY FLOODLIGHT

- Three different brightness levels using Lumen Select Technology
- Durable die-cast aluminum square head with UV resistant lens
- Easy install to wall or eave mounting, with integrated easy connector
- Switch activated, Dusk-to-Dawn, and motion activated models available
- Ideal for security lighting in residential and commercial applications



Dusk-To-Dawn models available



with sensor

Catalog Number	Description	Finish	Replaces Up To	CCT	Voltage	Selectable Lumens	Watts	UPC	Energy Star ID
TGS3S403FRRB	Triple Head Round	Bronze	270W INC	4000K	120V	2,000-3,000	27	080083913596	Pending
TGS3S403FRRW	Triple Head Round	White	270W INC	4000K	120V	2,000-3,000	27	080083913619	Pending
TGS3S403DRRB	Triple Head Round, D2D	Bronze	270W INC	4000K	120V	2,000-3,000	27	080083913671	Pending
TGS3S403DRRW	Triple Head Round, D2D	White	270W INC	4000K	120V	2,000-3,000	27	080083913695	Pending
TGS3S403MRRB	Triple Head Round, Motion	Bronze	270W INC	4000K	120V	2,000-3,000	27	080083256105	Pending
TGS3S403MRRW	Triple Head Round, Motion	White	270W INC	4000K	120V	2,000-3,000	27	080083256129	Pending

TGS Series – Single Head High Output SECURITY FLOODLIGHT

- Three different brightness levels using Lumen Select Technology
- Durable die-cast aluminum square head with UV resistant lens
- Easy install to wall or eave mounting, with integrated easy connector
- Switch activated, Dusk-to-Dawn, and motion activated models available
- Ideal for security lighting in residential and commercial applications



Dusk-To-Dawn models available



with sensor

Catalog Number	Description	Finish	Replaces Up To	CCT	Voltage	Selectable Lumens	Watts	UPC	Energy Star ID
TGS5S401DSCB	Single Head High Output Square, D2D	Bronze	175W Metal halide	4000K	120-277V	2,700-5,800	50	080083256013	Pending
TGS5S401MSCB	Single Head High Output Square, Motion	Bronze	175W Metal halide	4000K	120-277V	2,700-5,800	50	080083260041	Pending
TGS5S401MSCW	Single Head High Output Square, Motion	White	175W Metal halide	4000K	120-277V	2,700-5,800	50	080083260065	Pending

HALO FLOODLIGHT

VT Series VAPOR PROOF

- LED or incandescent options Available
- Durable die-cast aluminum housing and cage provides protection against vandalism
- Vapor tight IP65 rating protects against dust and moisture
- Versatile mounting options – Wall, Ceiling and Post
- Frosted glass lens provides smooth and even light distribution



Catalog Number	Description	Finish	Replaces Up To	CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
VT100G	100W Incandescent Vapor Tight	Raw	N/A	2700K	120V	1,600	100	080083757879	N/A
VT0840L	800 Lumen, 4000K, LED Vapor Tight	Raw	60W INC	4000K	120-277V	800	9	044427550113	N/A

ESF Series SECURITY FLOODLIGHT

- Sleek wrap-around lens design – enhanced aesthetics and low glare
- Two lumen packages available; 1400 and 2400 lumens in 2 color finishes
- Switch activated, Dusk-to-Dawn, and motion activated models available
- 50,000 hour lifespan, Wet Location rated & non-corrosive polycarbonate housing



Dusk-To-Dawn models available



with sensor



Catalog Number	Description	Finish	Replaces Up To	CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
ESF1A4FB	Twin Head Floodlight (1,400 Lumens)	Bronze	90W INC	4000K	120V	1,400	15	080083146000	N/A
ESF1A4FW	Twin Head Floodlight (1,400 Lumens)	White	90W INC	4000K	120V	1,400	15	080083146024	N/A
ESF1A4DB	Twin Head Floodlight (1,400 Lumens)	Bronze	90W INC	4000K	120V	1,400	15	080083146048	N/A
ESF1A4DW	Twin Head Floodlight, D2D, (1,400 Lumens)	White	90W INC	4000K	120V	1,400	15	080083146062	N/A
ESF1A4MB	Twin Head Floodlight, Motion (1,400 Lumens)	Bronze	90W INC	4000K	120V	1,400	15	080083146086	N/A
ESF1A4MW	Twin Head Floodlight, Motion (1,400 Lumens)	White	90W INC	4000K	120V	1,400	15	080083146109	N/A
ESF2A4FB	Twin Head Floodlight (2,300 Lumens)	Bronze	180W INC	4000K	120V	2,300	24	080083146123	N/A
ESF2A4FW	Twin Head Floodlight (2,300 Lumens)	White	180W INC	4000K	120V	2,300	24	080083146147	N/A
ESF2A4DB	Twin Head Floodlight (2,300 Lumens)	Bronze	180W INC	4000K	120V	2,300	24	080083146161	N/A
ESF2A4DW	Twin Head Floodlight, D2D, (2,300 Lumens)	White	180W INC	4000K	120V	2,300	24	080083146185	N/A
ESF2A4MB	Twin Head Floodlight, Motion (2,300 Lumens)	Bronze	180W INC	4000K	120V	2,300	24	080083146208	N/A
ESF2A4MW	Twin Head Floodlight, Motion (2,300 Lumens)	White	180W INC	4000K	120V	2,300	24	080083146222	N/A

DREAM. EXPERIMENT. PLAN.

A more powerful way to design.



Light ARchitect™

▶ See your space in a new light with augmented reality

We've taken the guesswork out of lighting design with Light ARchitect, an augmented reality mobile app that lets you instantly visualize light fixtures in your space.

- ▶ Browse state-of-the-art light LED fixtures and choose the ones you want to see in your space
- ▶ Adjust the fixture's finish, lumen output, mounting height, color temperature and more
- ▶ Virtually turn lights on to get the full effect
- ▶ Take screenshots to share and email to clients or colleagues



Light ARchitect is free and available for iOS and Android devices

Download **Light ARchitect**



To learn how Light ARchitect has changed our customers' way of working, visit cooperlighting.com/lightarchitect

Lighting & Controls

STOCK PRODUCT GUIDE

LIGHTING BRANDS

Ametrix
AtLite
Corelite
Ephesus
Fail-Safe
HALO
HALO Commercial
Invue
iO
Iris
Lumark
Lumière
McGraw-Edison
Metalux
MWS
Neo-Ray
Portfolio
PrentaLux - 3D Printed Lighting
RSA
Shaper
Streetworks
Sure-Lites
Telensa

CONTROLS BRANDS

Greengate
Fifth Light
Intelligent Lighting Controls

CONNECTED LIGHTING SYSTEMS AND SMART SPACES PLATFORM

WaveLinx



Cooper Lighting Solutions
1121 Highway 74 South
Peachtree City, GA 30269
P: 770-486-4800
www.cooperlighting.com

Canada Sales
5925 McLaughlin Road
Mississauga, Ontario L5R 1B8
P: 905-501-3000
F: 905-501-3172

© 2024 Cooper Lighting Solutions
All Rights Reserved
Printed in USA
Publication No. CA525990
January 2024

Cooper Lighting Solutions is a registered trademark.

All other trademarks are property of their respective owners.

Product availability, specifications, and compliances are subject to change without notice.